



ESTIMATE OF QUANTITIES			
BASE BID			
ITEM	QTY	UNIT	DESCRIPTION
202	352	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
202	1280	LF	CURB AND GUTTER REMOVED
254	18750	SY	PAVEMENT PLANING (3")
407	1600	GAL	TACK COAT (0.085 GAL/SY)
441	790	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	790	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	352	SF	CURB RAMP - CONTINGENCY ITEM
609	1280	LF	CURB AND GUTTER
614	1	LS	MAINTAIN TRAFFIC
624	1	LS	MOBILIZATION
644	0.62	MILE	CENTERLINE (DOUBLE YELLOW)
644	125	LF	CHANNELIZING LINE
644	427	LF	CROSSWALK LINE, 24" CONTINENTAL
644	148	LF	STOP LINE
644	4	EA	LANE ARROW
659	250	SY	SEEDING & MULCHING, CLASS 1 - CONTINGENCY ITEM

NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

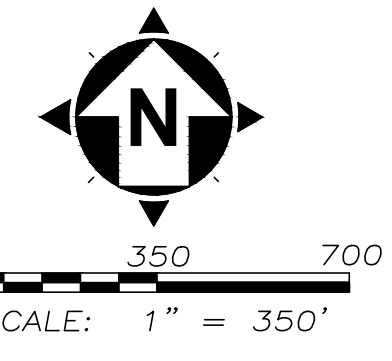

INDEX MAP

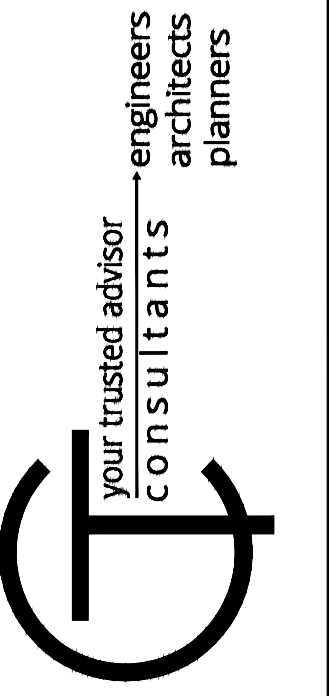

ISSUED FOR:	2024 SIP BID SET
ISSUE DATE:	05/13/2024
SCALE:	1" = 350'
DESIGNED BY:	MHA
DRAWN BY:	ADG
CHECKED BY:	DWW
NO.	REVISION
DATE	



2024 STREET IMPROVEMENTS
 - CITY OF SUNBURY, OHIO -
INDEX MAP

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
1	12

ESTIMATE OF QUANTITIES			
MILL STONE DR			
ITEM	QTY	UNIT	DESCRIPTION
202	39	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
202	110	LF	CURB AND GUTTER REMOVED
254	1690	SY	PAVEMENT PLANING (3")
407	140	GAL	TACK COAT (0.085 GAL/SY)
441	70	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	70	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	39	SF	CURB RAMP - CONTINGENCY ITEM
609	110	LF	CURB AND GUTTER
644	46	LF	CROSSWALK LINE, 24" CONTINENTAL
644	12	LF	STOP LINE

ESTIMATE OF QUANTITIES			
MILL STONE CT			
ITEM	QTY	UNIT	DESCRIPTION
202	20	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
202	50	LF	CURB AND GUTTER REMOVED
254	1140	SY	PAVEMENT PLANING (3")
407	100	GAL	TACK COAT (0.085 GAL/SY)
441	50	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	50	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	20	SF	CURB RAMP - CONTINGENCY ITEM
609	50	LF	CURB AND GUTTER
644	24	LF	CROSSWALK LINE, 24" CONTINENTAL
644	12	LF	STOP LINE

NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

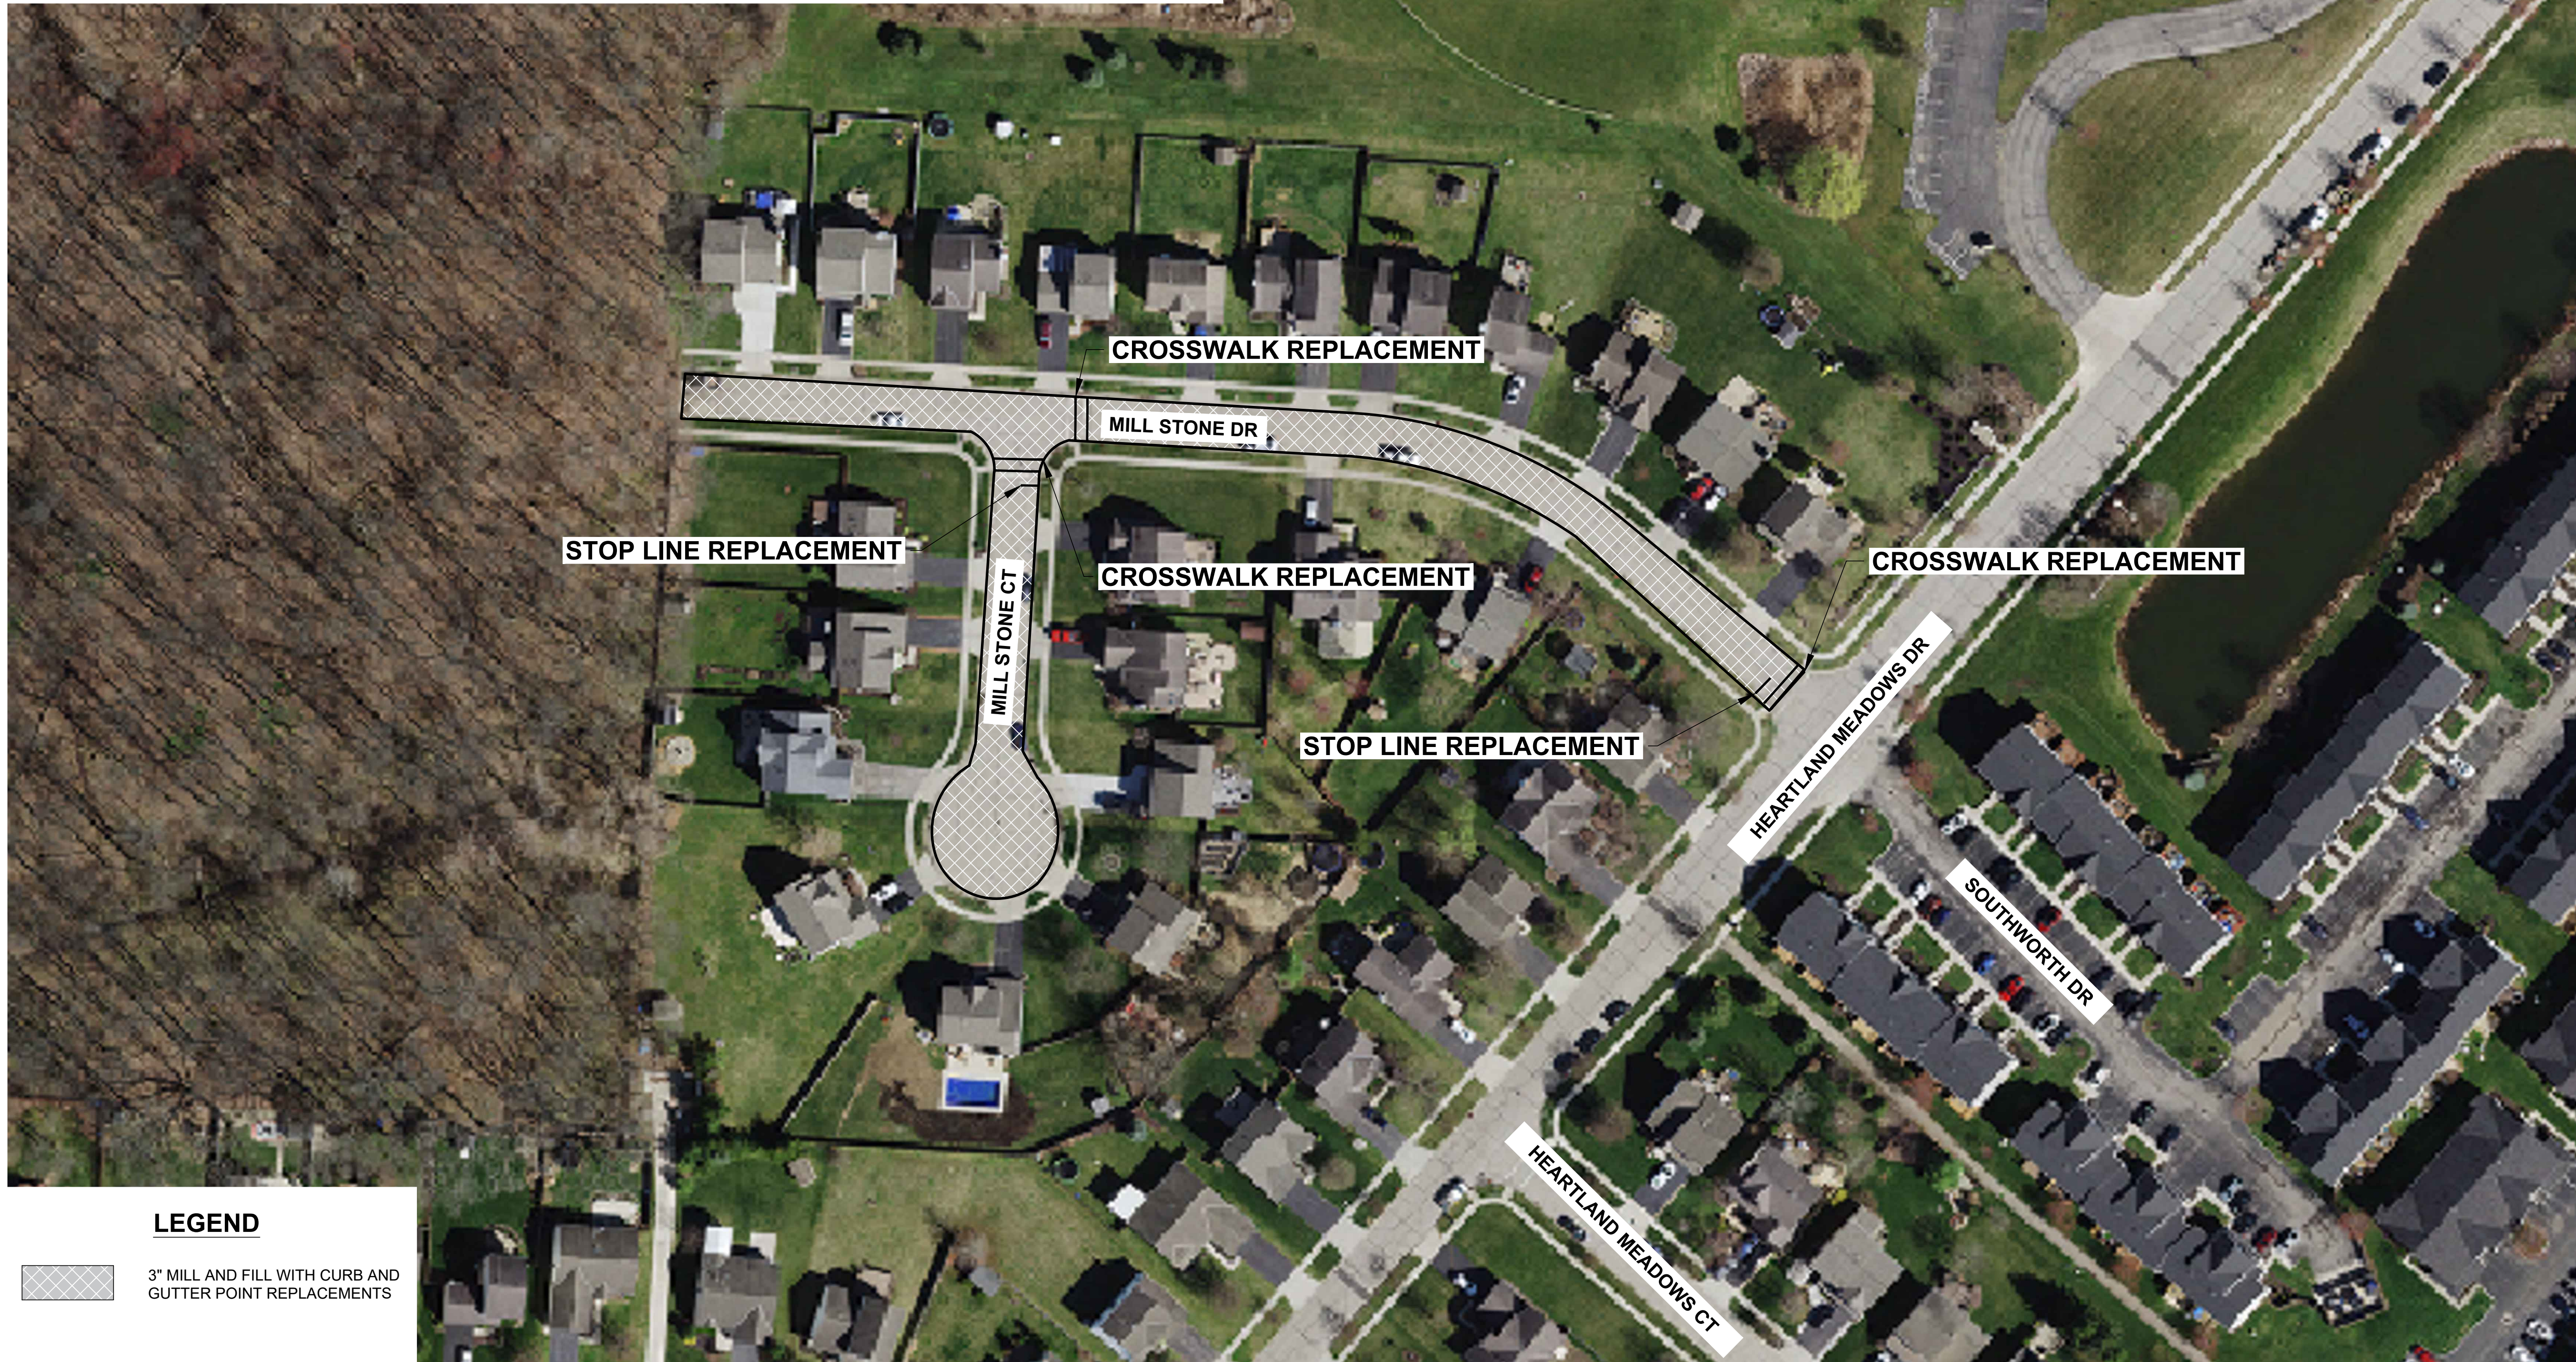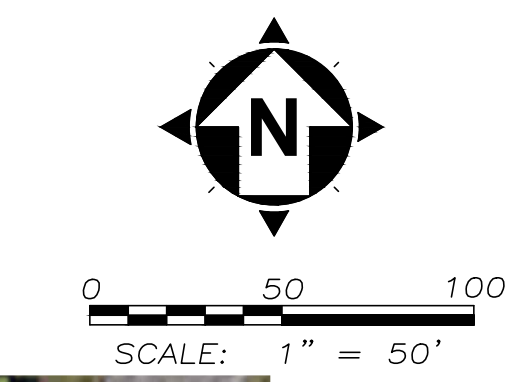

LEGEND

 3" MILL AND FILL WITH CURB AND GUTTER POINT REPLACEMENTS

MILL STONE DR & CT.

your trusted advisor
consultants
 engineers
 architects
 planners


NO	REVISION	DATE

ISSUED FOR: 2024 SIP BID SET
 ISSUE DATE: 05/13/2024
 SCALE: 1" = 50'
 DESIGNED BY: MHA
 DRAWN BY: ADG
 CHECKED BY: DWV

2024 STREET IMPROVEMENTS	
- CITY OF SUNBURY, OHIO -	
MILL STONE DR & MILL STONE CT.	
PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
2	12

ESTIMATE OF QUANTITIES			
E. CHERRY ST			
ITEM	QTY	UNIT	DESCRIPTION
202	39	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
202	140	LF	CURB AND GUTTER REMOVED
254	1410	SY	PAVEMENT PLANING (3")
407	120	GAL	TACK COAT (0.085 GAL/SY)
441	60	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	60	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	39	SF	CURB RAMP - CONTINGENCY ITEM
609	140	LF	CURB AND GUTTER
644	0.07	MILE	CENTERLINE (DOUBLE YELLOW)
644	80	LF	CROSSWALK LINE, 24" CONTINENTAL
644	50	LF	STOP LINE


NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

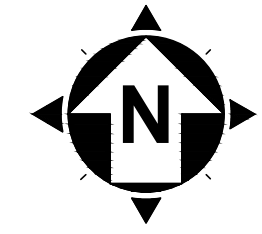

0 20 40
SCALE: 1" = 20'



LEGEND	
	3" MILL AND FILL WITH CURB AND GUTTER POINT REPLACEMENTS

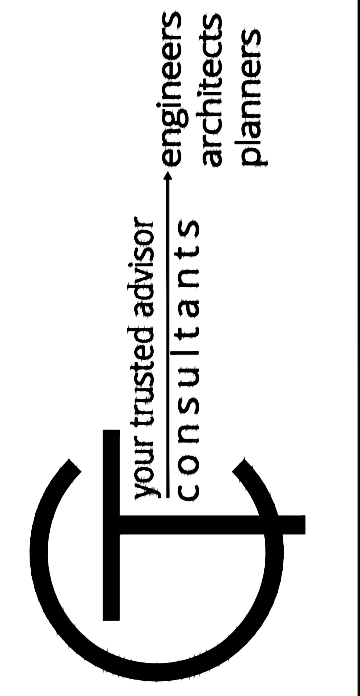

ISSUED FOR: 2024 SIP BID SET	NO	REVISION	DATE
ISSUE DATE: 05/13/2024			
SCALE: 1" = 20'			
DESIGNED BY: MHA			
DRAWN BY: ADG			
CHECKED BY: DWV			



2024 STREET IMPROVEMENTS
- CITY OF SUNBURY, OHIO -
E. CHERRY ST

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
3	12

E. CHERRY ST


ESTIMATE OF QUANTITIES			
W. SEDGEWICK AVE			
ITEM	QTY	UNIT	DESCRIPTION
254	700	SY	PAVEMENT PLANING (3")
407	60	GAL	TACK COAT (0.085 GAL/SY)
441	30	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	30	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
644	6	LF	STOP LINE

NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

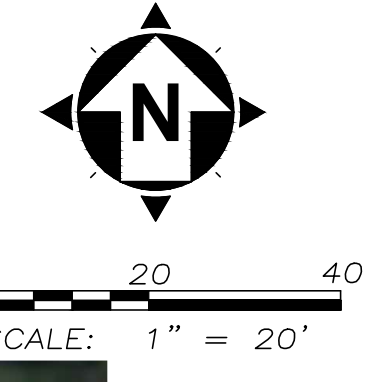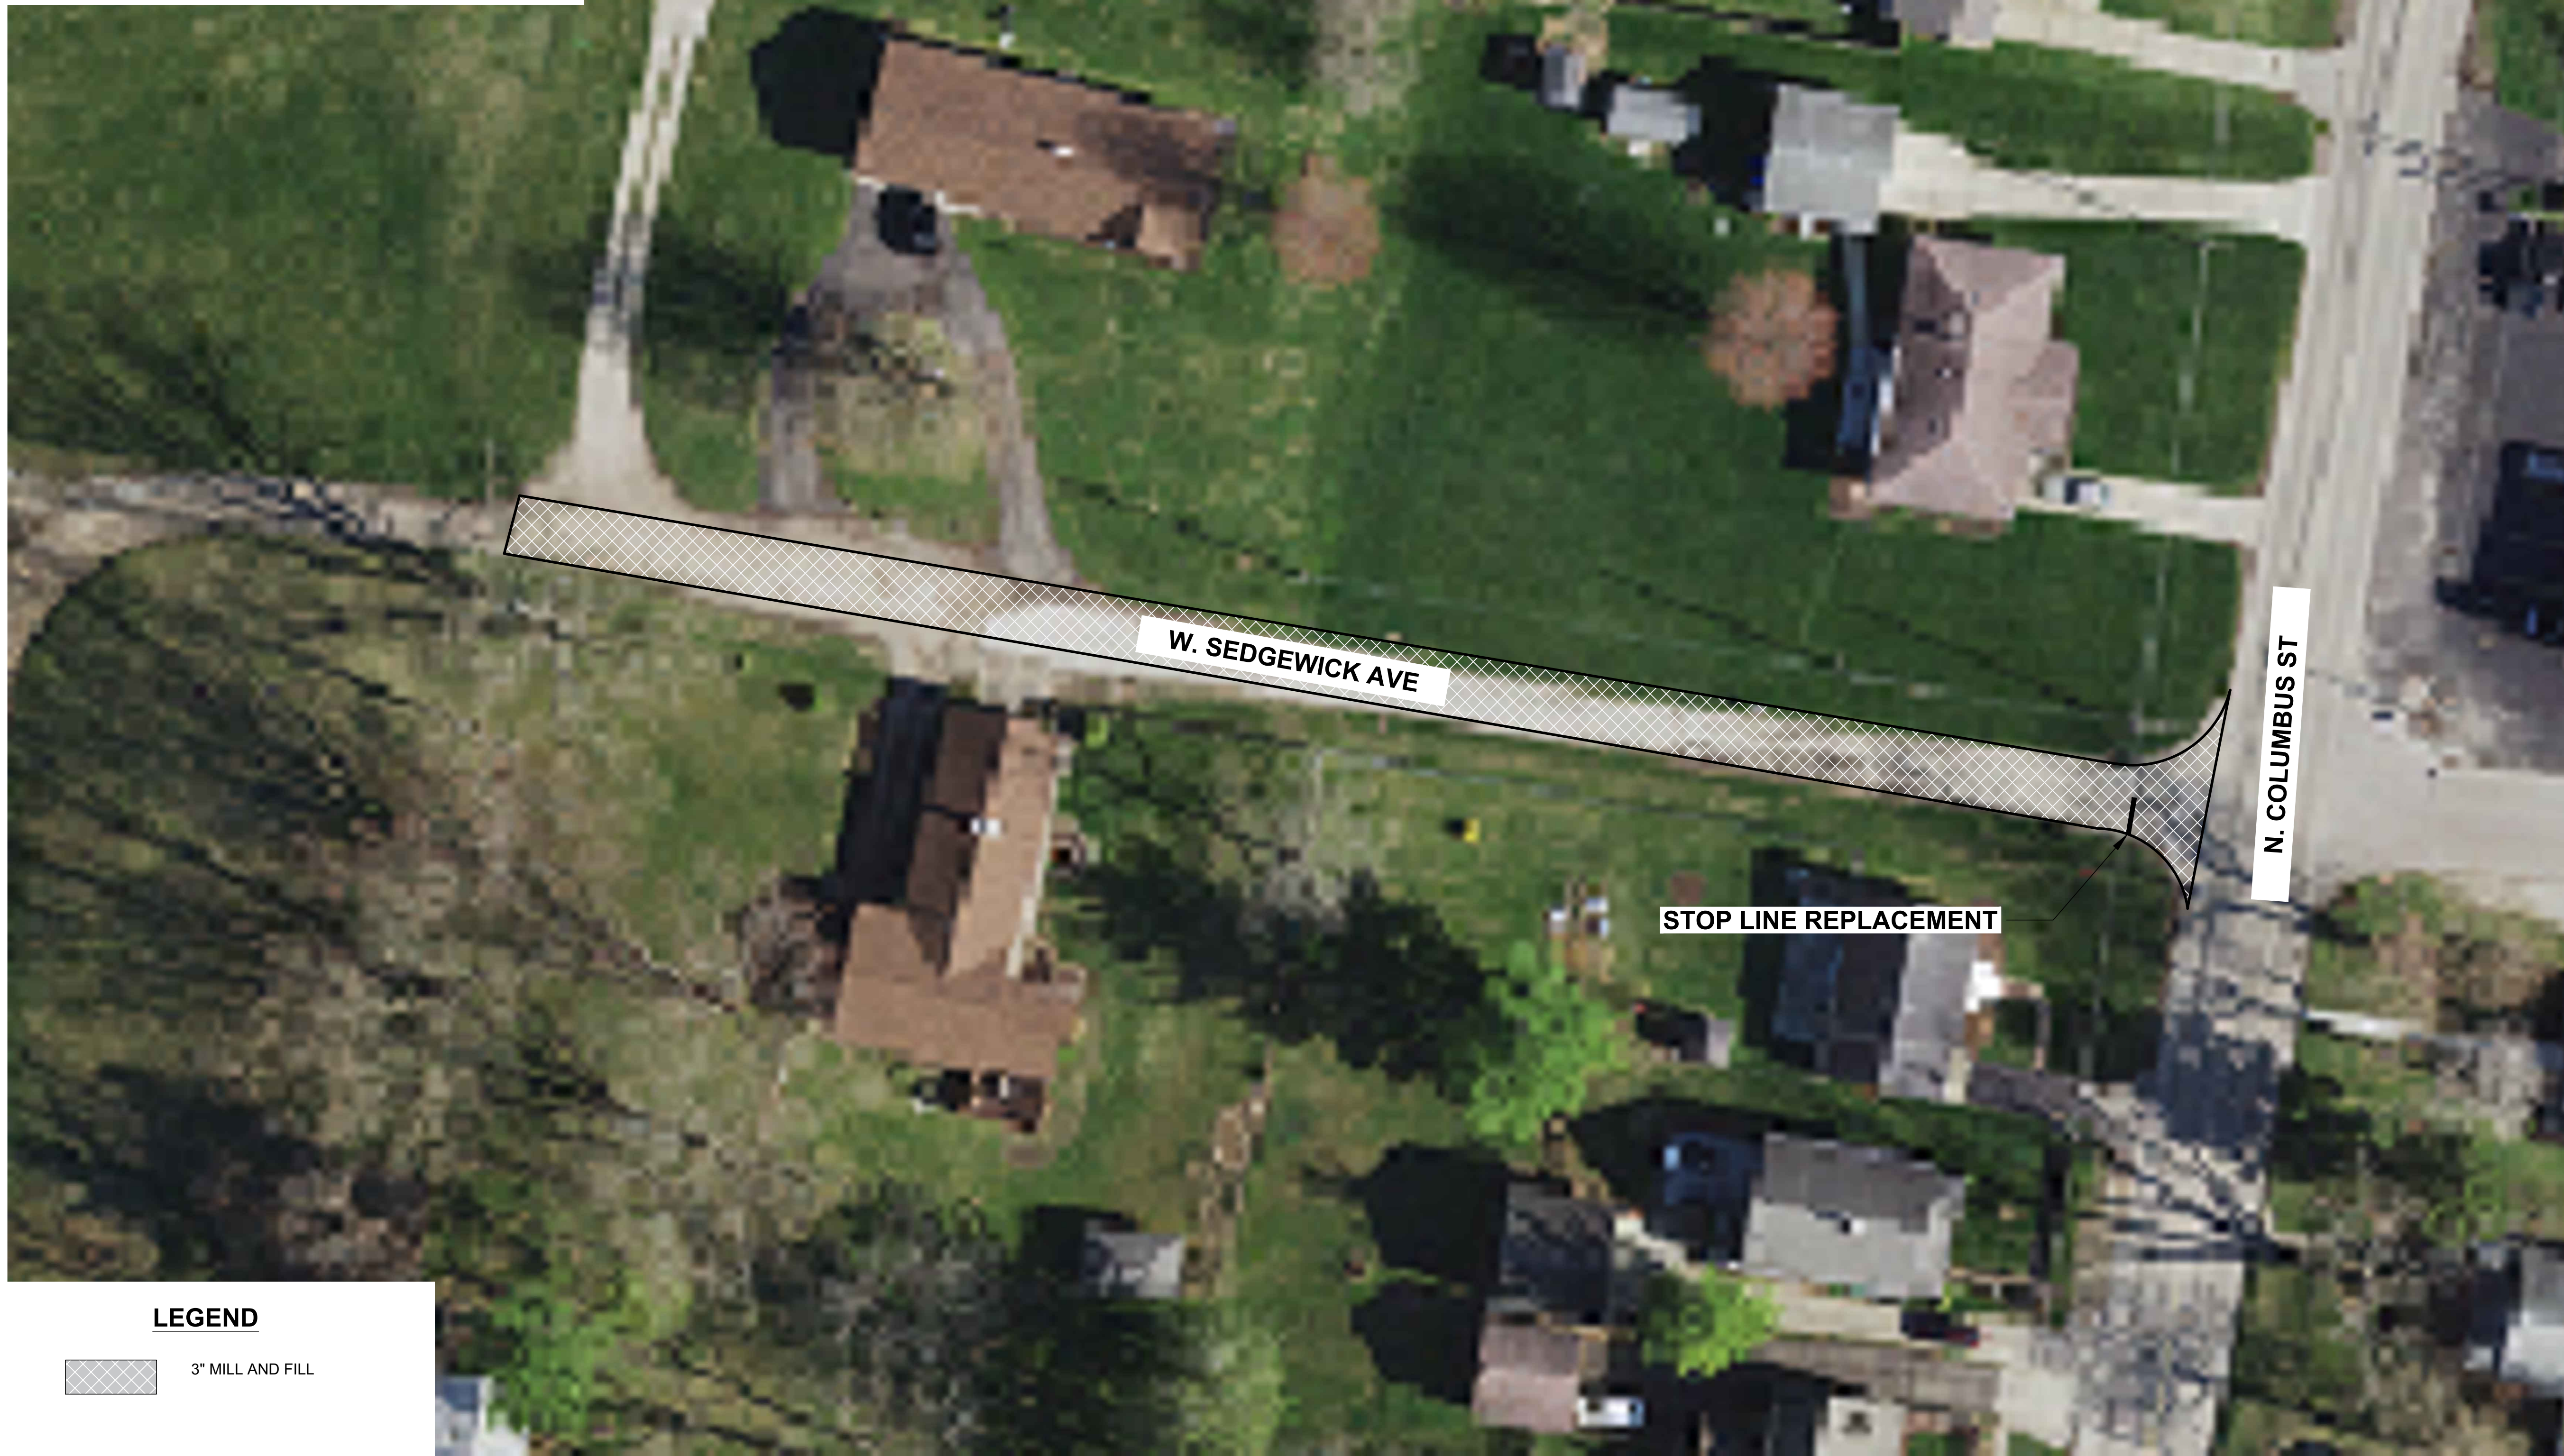

LEGEND

 3" MILL AND FILL

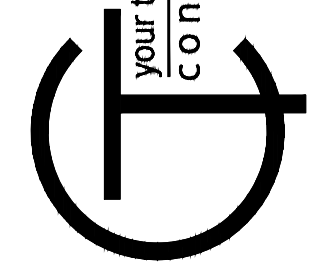

your trusted advisor
consultants

engineers
architects
planners

NO	REVISION	DATE

ISSUED FOR: 2024 SIP BID SET	ISSUE DATE: 05/13/2024	SCALE: 1" = 20'	DESIGNED BY: MHA	DRAWN BY: ADG	CHECKED BY: DWV
------------------------------	------------------------	-----------------	------------------	---------------	-----------------

2024 STREET IMPROVEMENTS

- CITY OF SUNBURY, OHIO -



W. SEDGEWICK AVE

PROJECT NO.	
24000704	
DISCIPLINE	
CIVIL	
SHEET NAME	
EXHIBIT	
SHEET	OF
4	12

W. SEDGEWICK AVE

ESTIMATE OF QUANTITIES			
STONE ST			
ITEM	QTY	UNIT	DESCRIPTION
254	840	SY	PAVEMENT PLANING (3")
407	70	GAL	TACK COAT (0.085 GAL/SY)
441	40	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	40	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")


NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

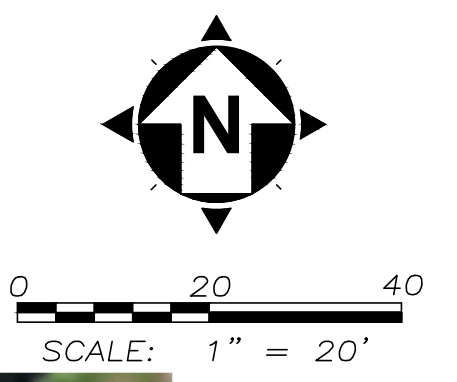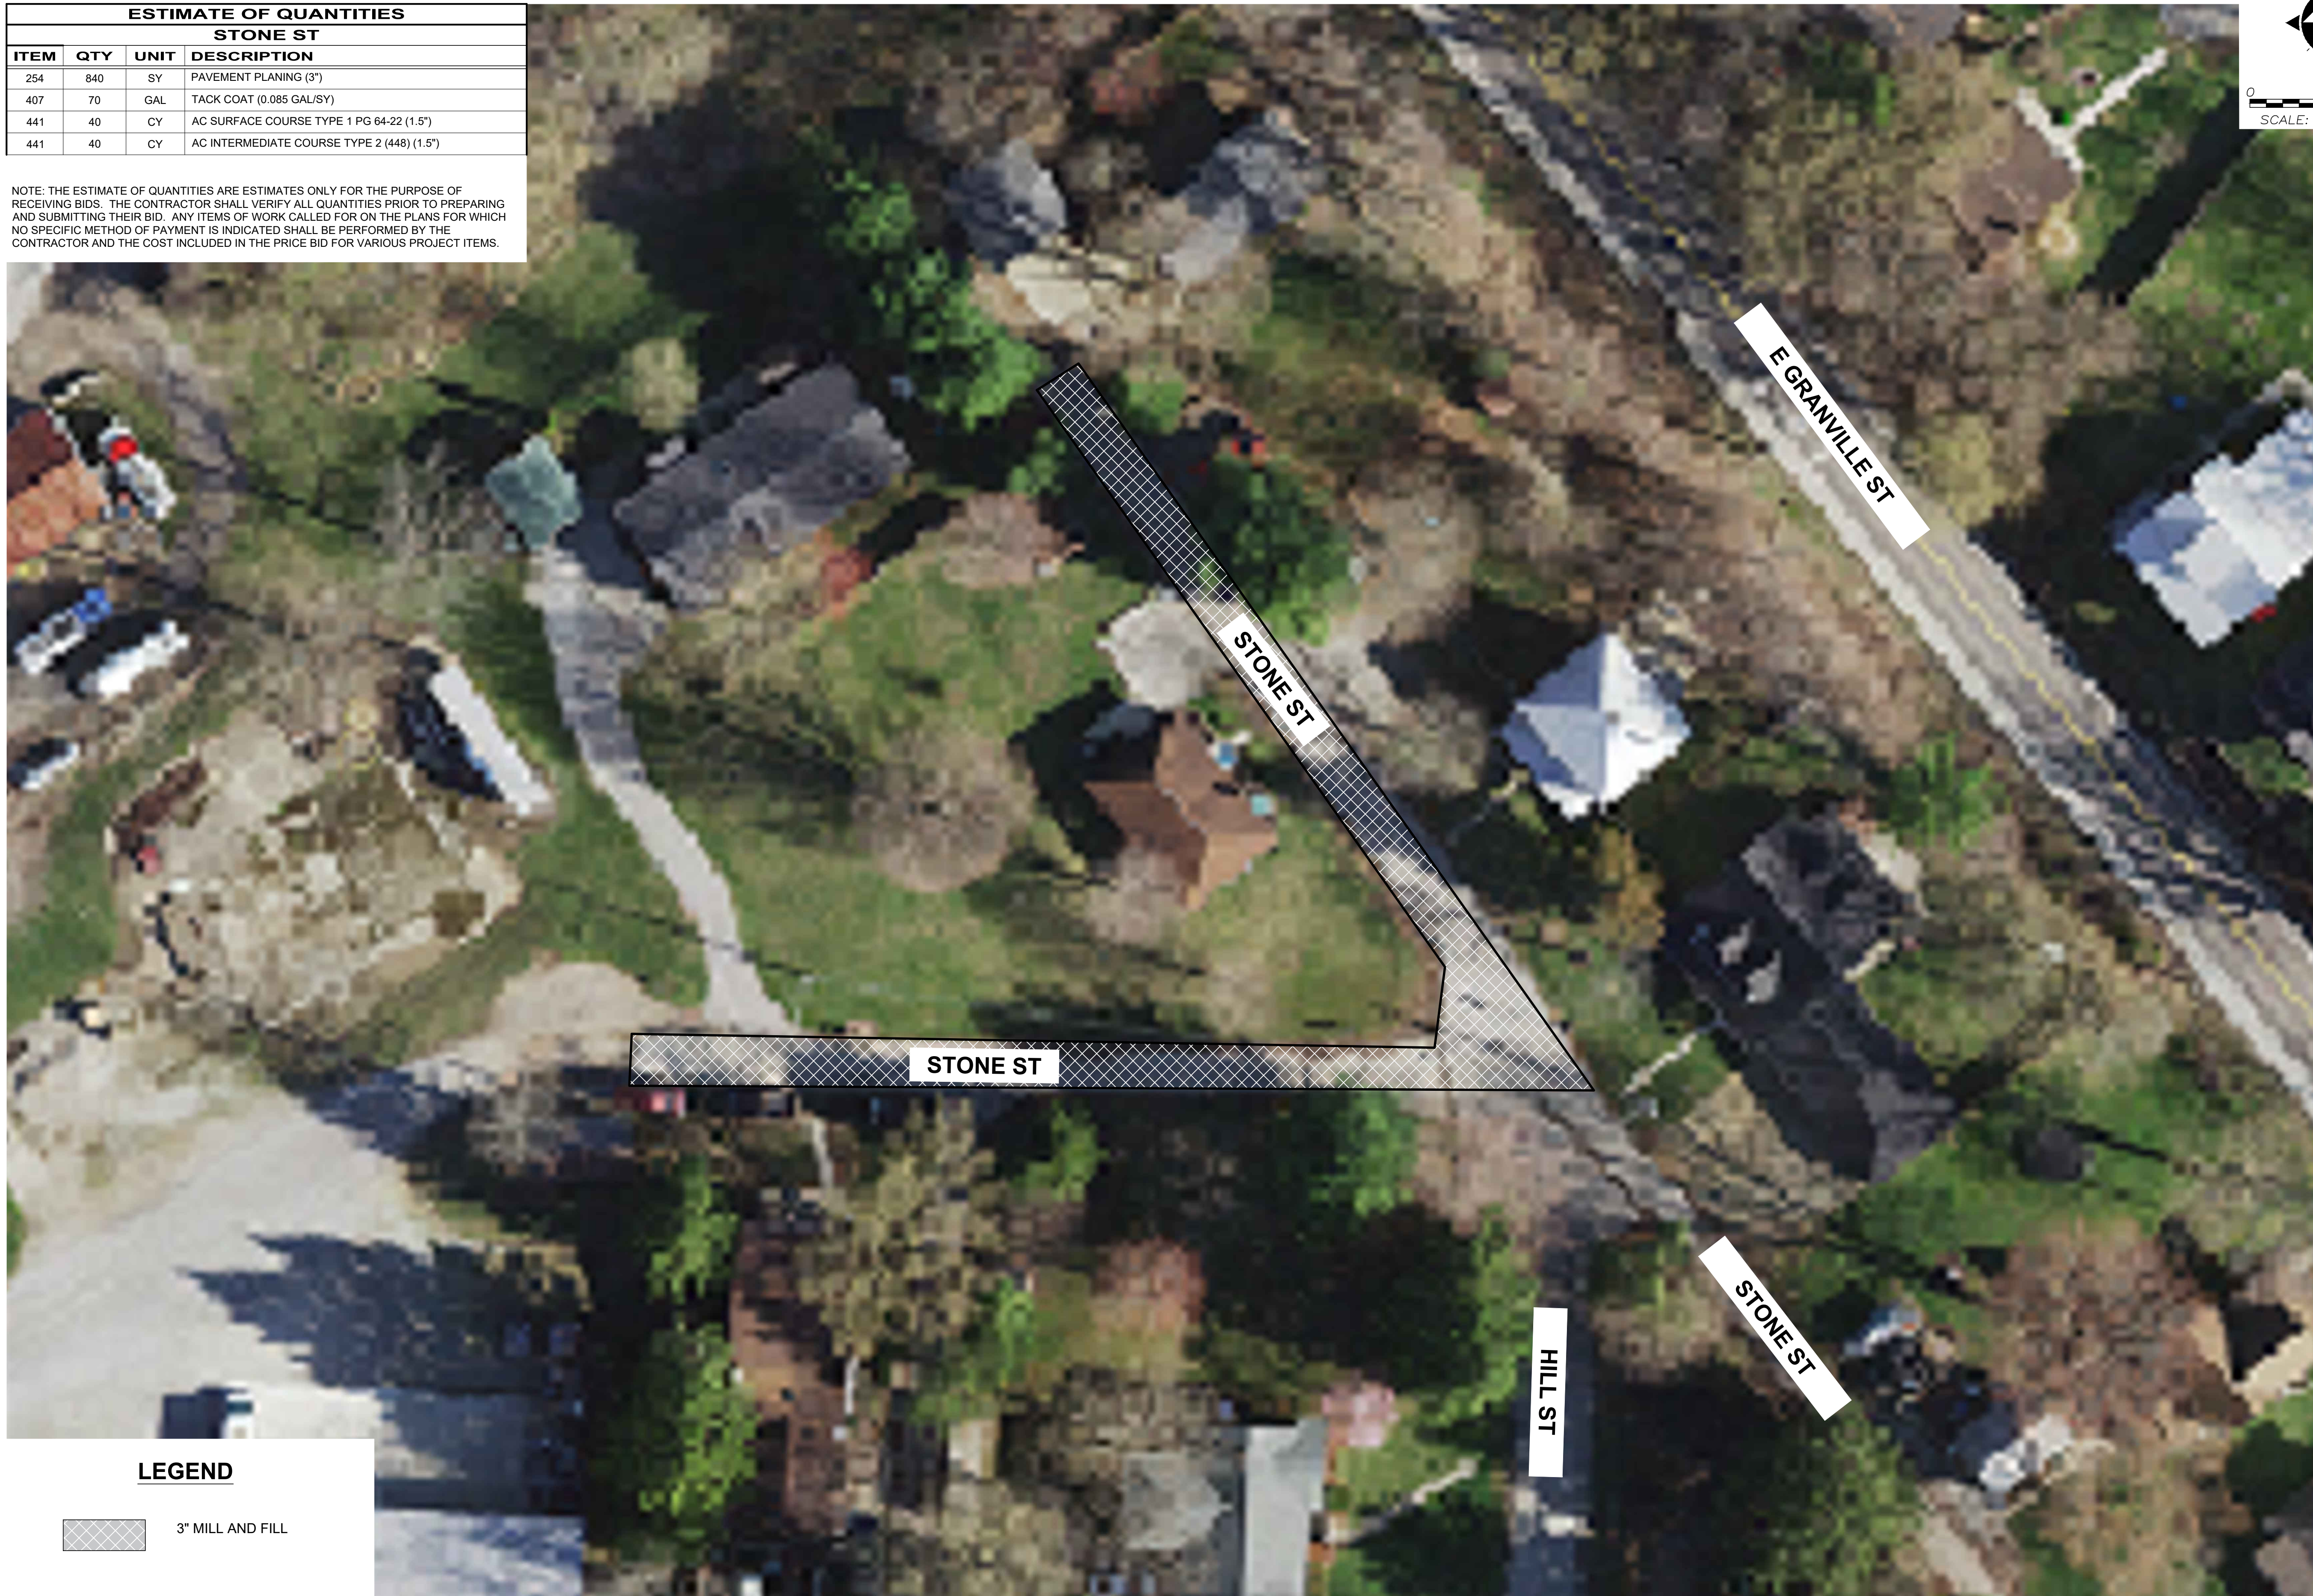

LEGEND

 3" MILL AND FILL

your trusted advisor
consultants
 engineers
 architects
 planners

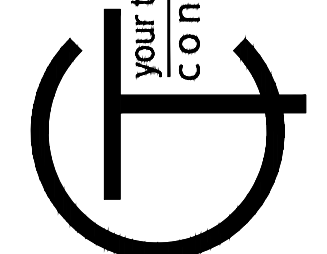

NO	REVISION	DATE

ISSUED FOR: 2024 SIP BID SET
 ISSUE DATE: 05/13/2024
 SCALE: 1" = 20'
 DESIGNED BY: MHA
 DRAWN BY: ADG
 CHECKED BY: DWV



2024 STREET IMPROVEMENTS
 - CITY OF SUNBURY, OHIO -
STONE ST.

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
5	12


STONE ST.

ESTIMATE OF QUANTITIES			
FAYBURROW DR			
ITEM	QTY	UNIT	DESCRIPTION
202	39	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
202	120	LF	CURB AND GUTTER REMOVED
254	1880	SY	PAVEMENT PLANING (3")
407	160	GAL	TACK COAT (0.085 GAL/SY)
441	80	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	80	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	39	SF	CURB RAMP - CONTINGENCY ITEM
609	120	LF	CURB AND GUTTER
644	75	LF	CROSSWALK LINE, 24" CONTINENTAL
644	36	LF	STOP LINE

NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

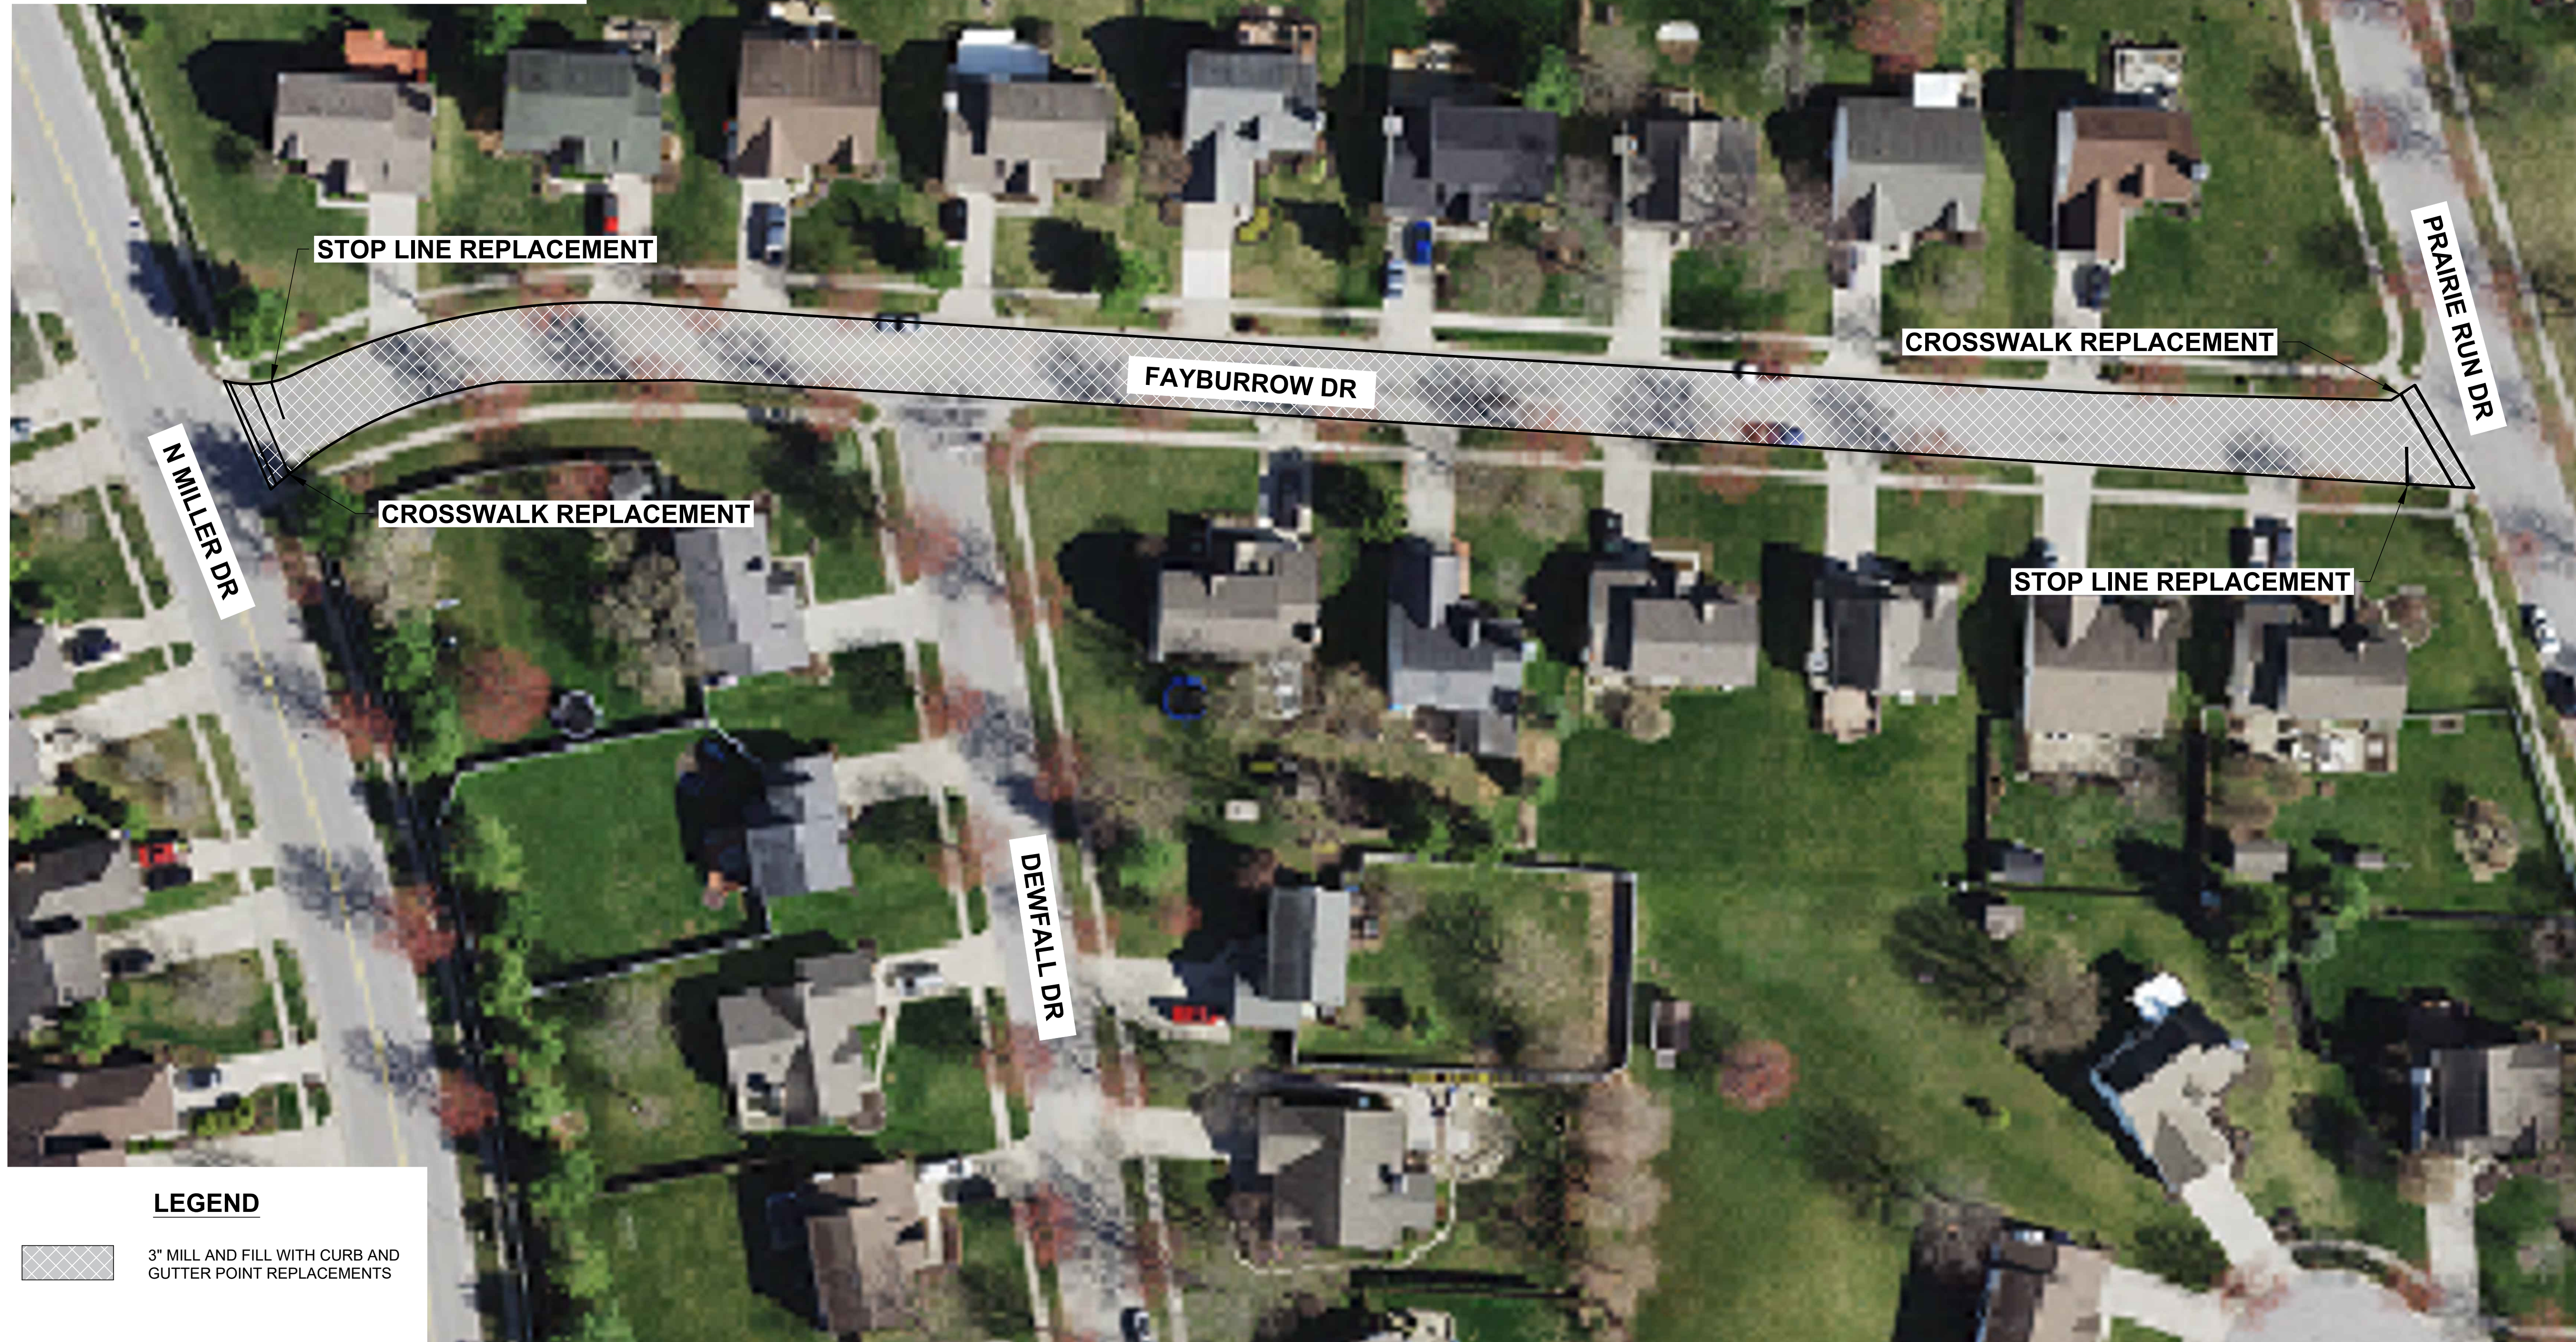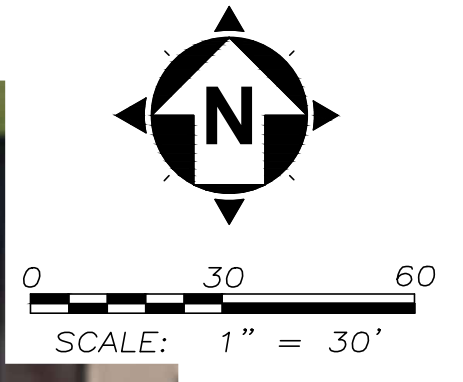

LEGEND	
	3" MILL AND FILL WITH CURB AND GUTTER POINT REPLACEMENTS

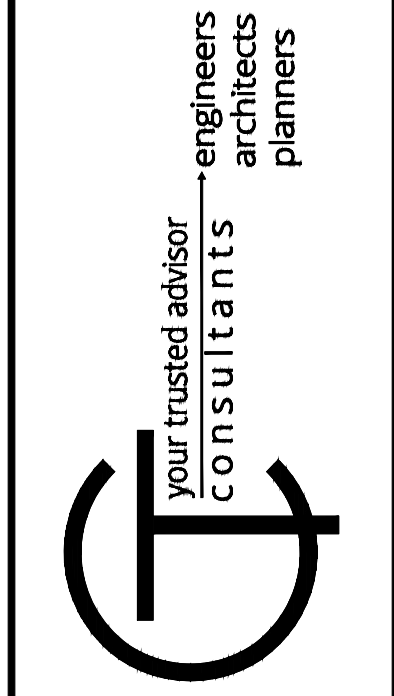

ISSUED FOR:	DATE
2024 SIP BID SET	
ISSUE DATE:	05/13/2024
SCALE:	1" = 30'
DESIGNED BY:	MHA
DRAWN BY:	ADG
CHECKED BY:	DWW


2024 STREET IMPROVEMENTS
 - CITY OF SUNBURY, OHIO -
FAYBURROW DR

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
6	12

FAYBURROW DR

ESTIMATE OF QUANTITIES			
LEESTONE CT			
ITEM	QTY	UNIT	DESCRIPTION
202	20	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
202	10	LF	CURB AND GUTTER REMOVED
254	200	SY	PAVEMENT PLANING (3")
407	20	GAL	TACK COAT (0.085 GAL/SY)
441	10	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	10	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	20	SF	CURB RAMP - CONTINGENCY ITEM
609	10	LF	CURB AND GUTTER
644	30	LF	CROSSWALK LINE, 24" CONTINENTAL
644	12	LF	STOP LINE

NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

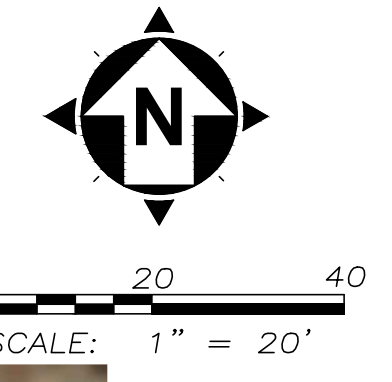

your trusted advisor
consultants
engineers
architects
planners

NO	REVISION	DATE


ISSUED FOR: 2024 SIP BID SET	ISSUE DATE: 05/13/2024	SCALE: 1" = 20'	DESIGNED BY: MHA	DRAWN BY: ADG	CHECKED BY: DWV
------------------------------	------------------------	-----------------	------------------	---------------	-----------------

2024 STREET IMPROVEMENTS
- CITY OF SUNBURY, OHIO -
LEESTONE CT

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
7	12

ESTIMATE OF QUANTITIES			
N. MILLER DR			
ITEM	QTY	UNIT	DESCRIPTION
202	195	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
202	850	LF	CURB AND GUTTER REMOVED
254	10890	SY	PAVEMENT PLANING (3")
407	930	GAL	TACK COAT (0.085 GAL/SY)
441	450	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	450	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	195	SF	CURB RAMP - CONTINGENCY ITEM
609	850	LF	CURB AND GUTTER
644	0.55	MILE	CENTERLINE (DOUBLE YELLOW)
644	125	LF	CHANNELIZING LINE
644	172	LF	CROSSWALK LINE, 24" CONTINENTAL
644	20	LF	STOP LINE
644	4	EA	LANE ARROW

NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

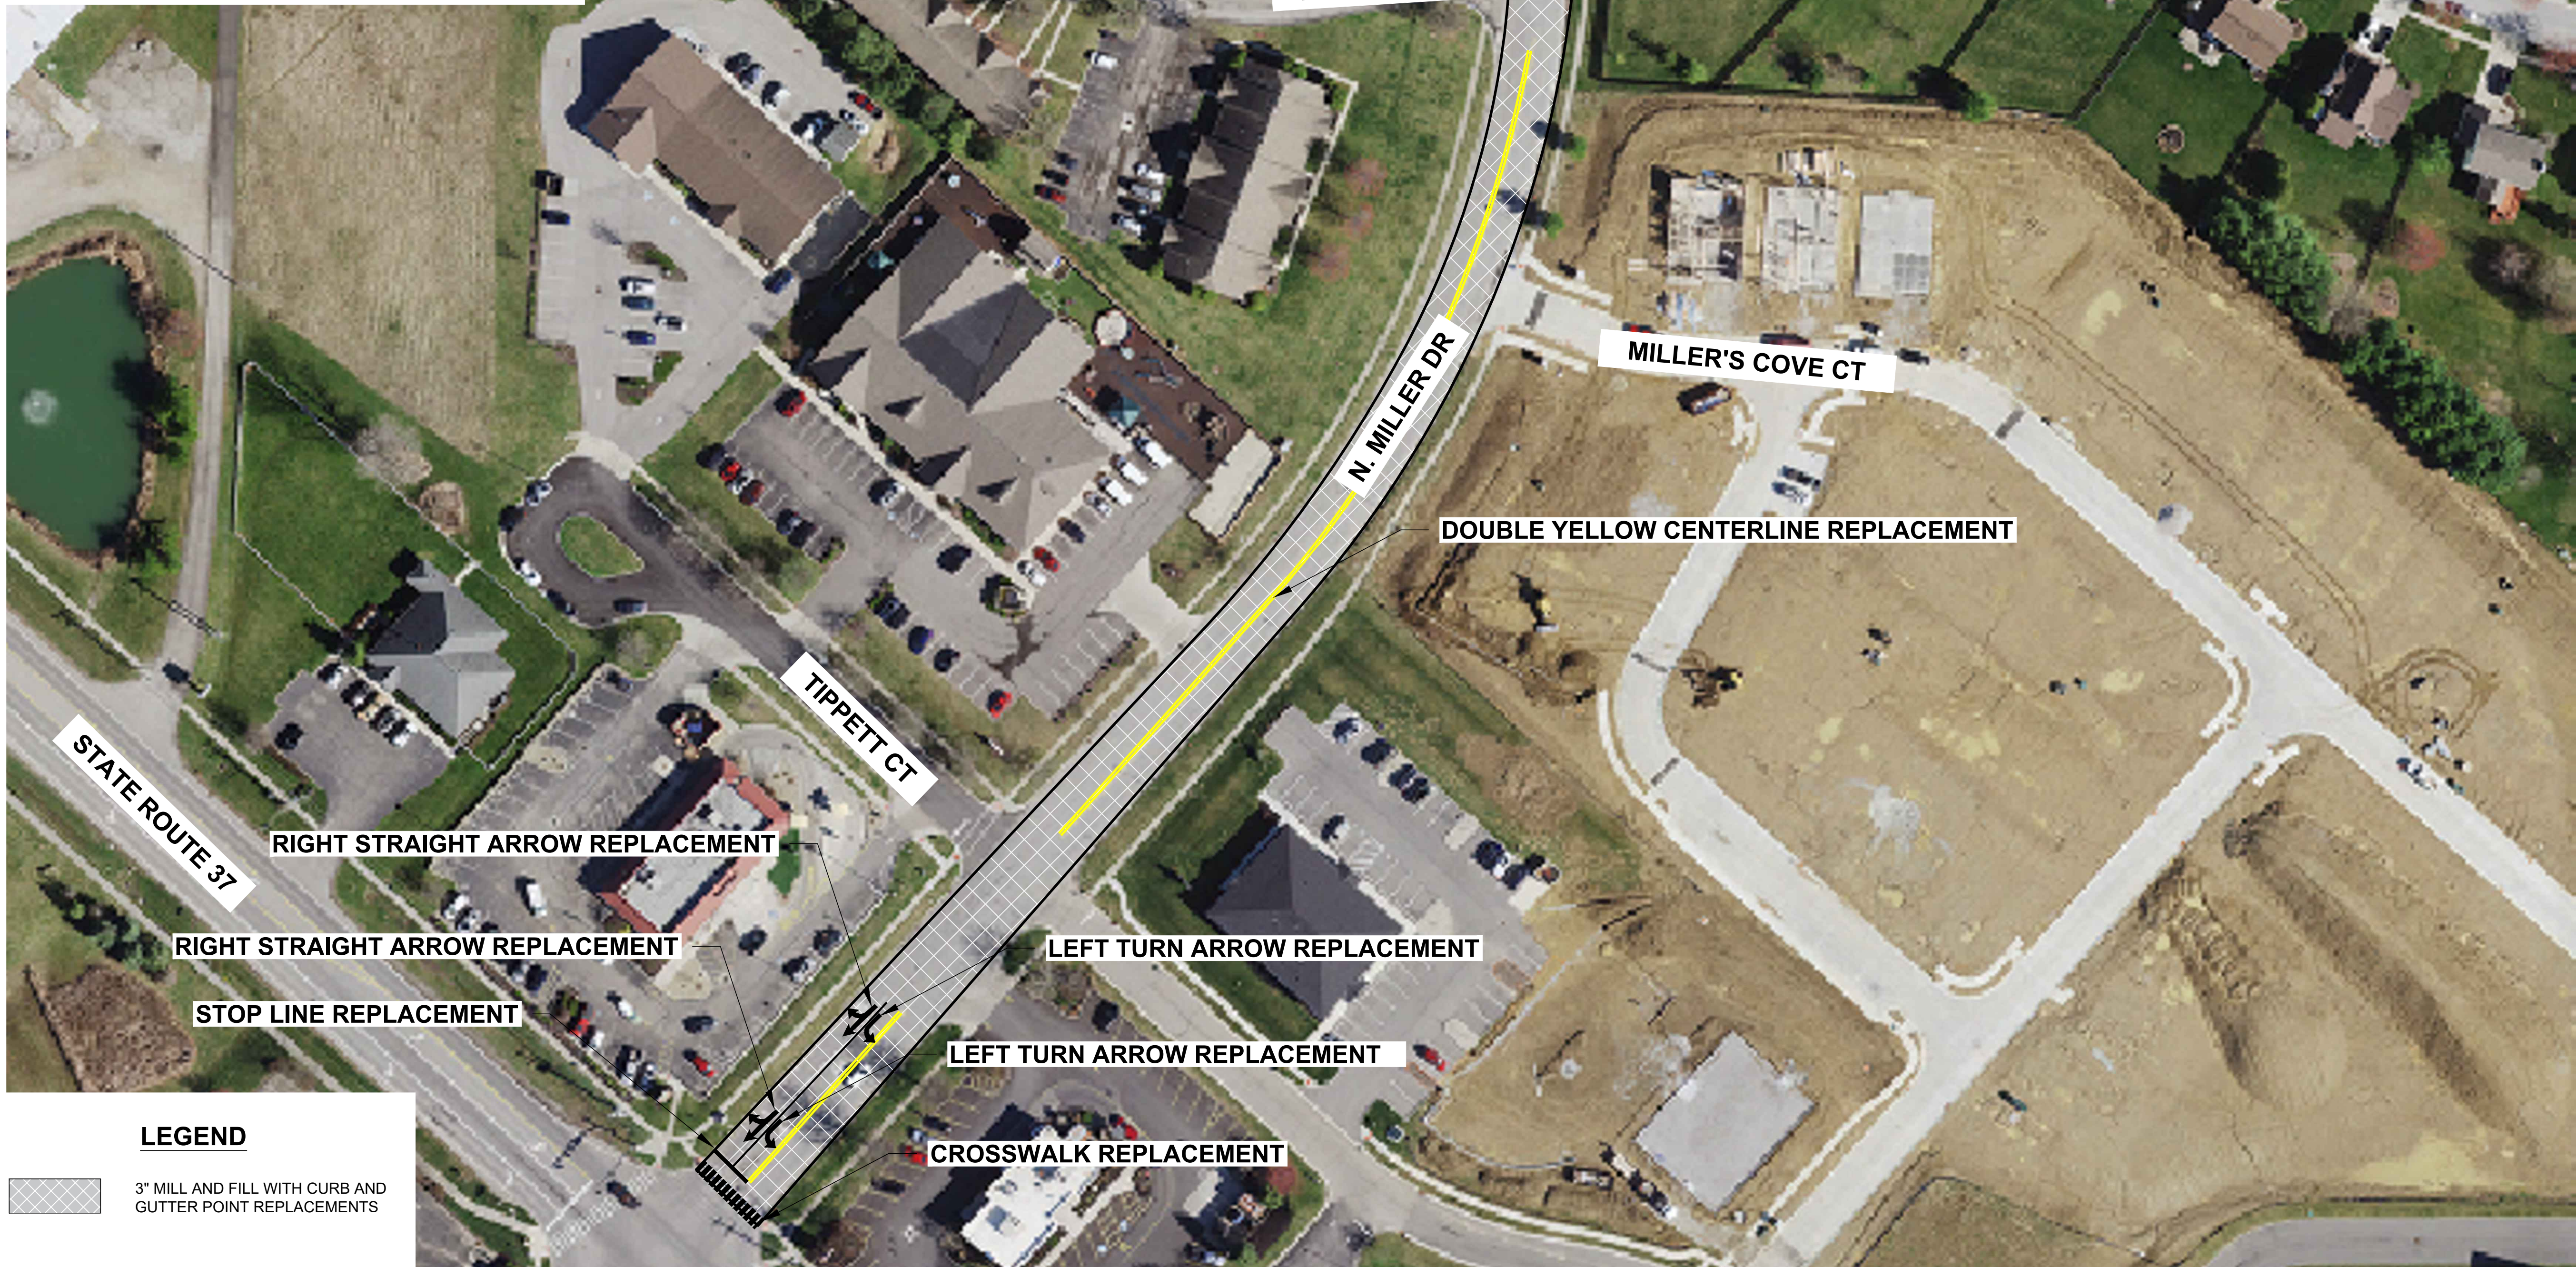

LEGEND

	3" MILL AND FILL WITH CURB AND GUTTER POINT REPLACEMENTS
--	--

your trusted advisor
**engineers
architects
planners**


NO	REVISION	DATE

ISSUED FOR: 2024 SIP BID SET
 ISSUE DATE: 05/13/2024
 SCALE: 1" = 50'
 DESIGNED BY: MHA
 DRAWN BY: ADG
 CHECKED BY: DWV

2024 STREET IMPROVEMENTS
 - CITY OF SUNBURY, OHIO -

N. MILLER DR,

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
8	12

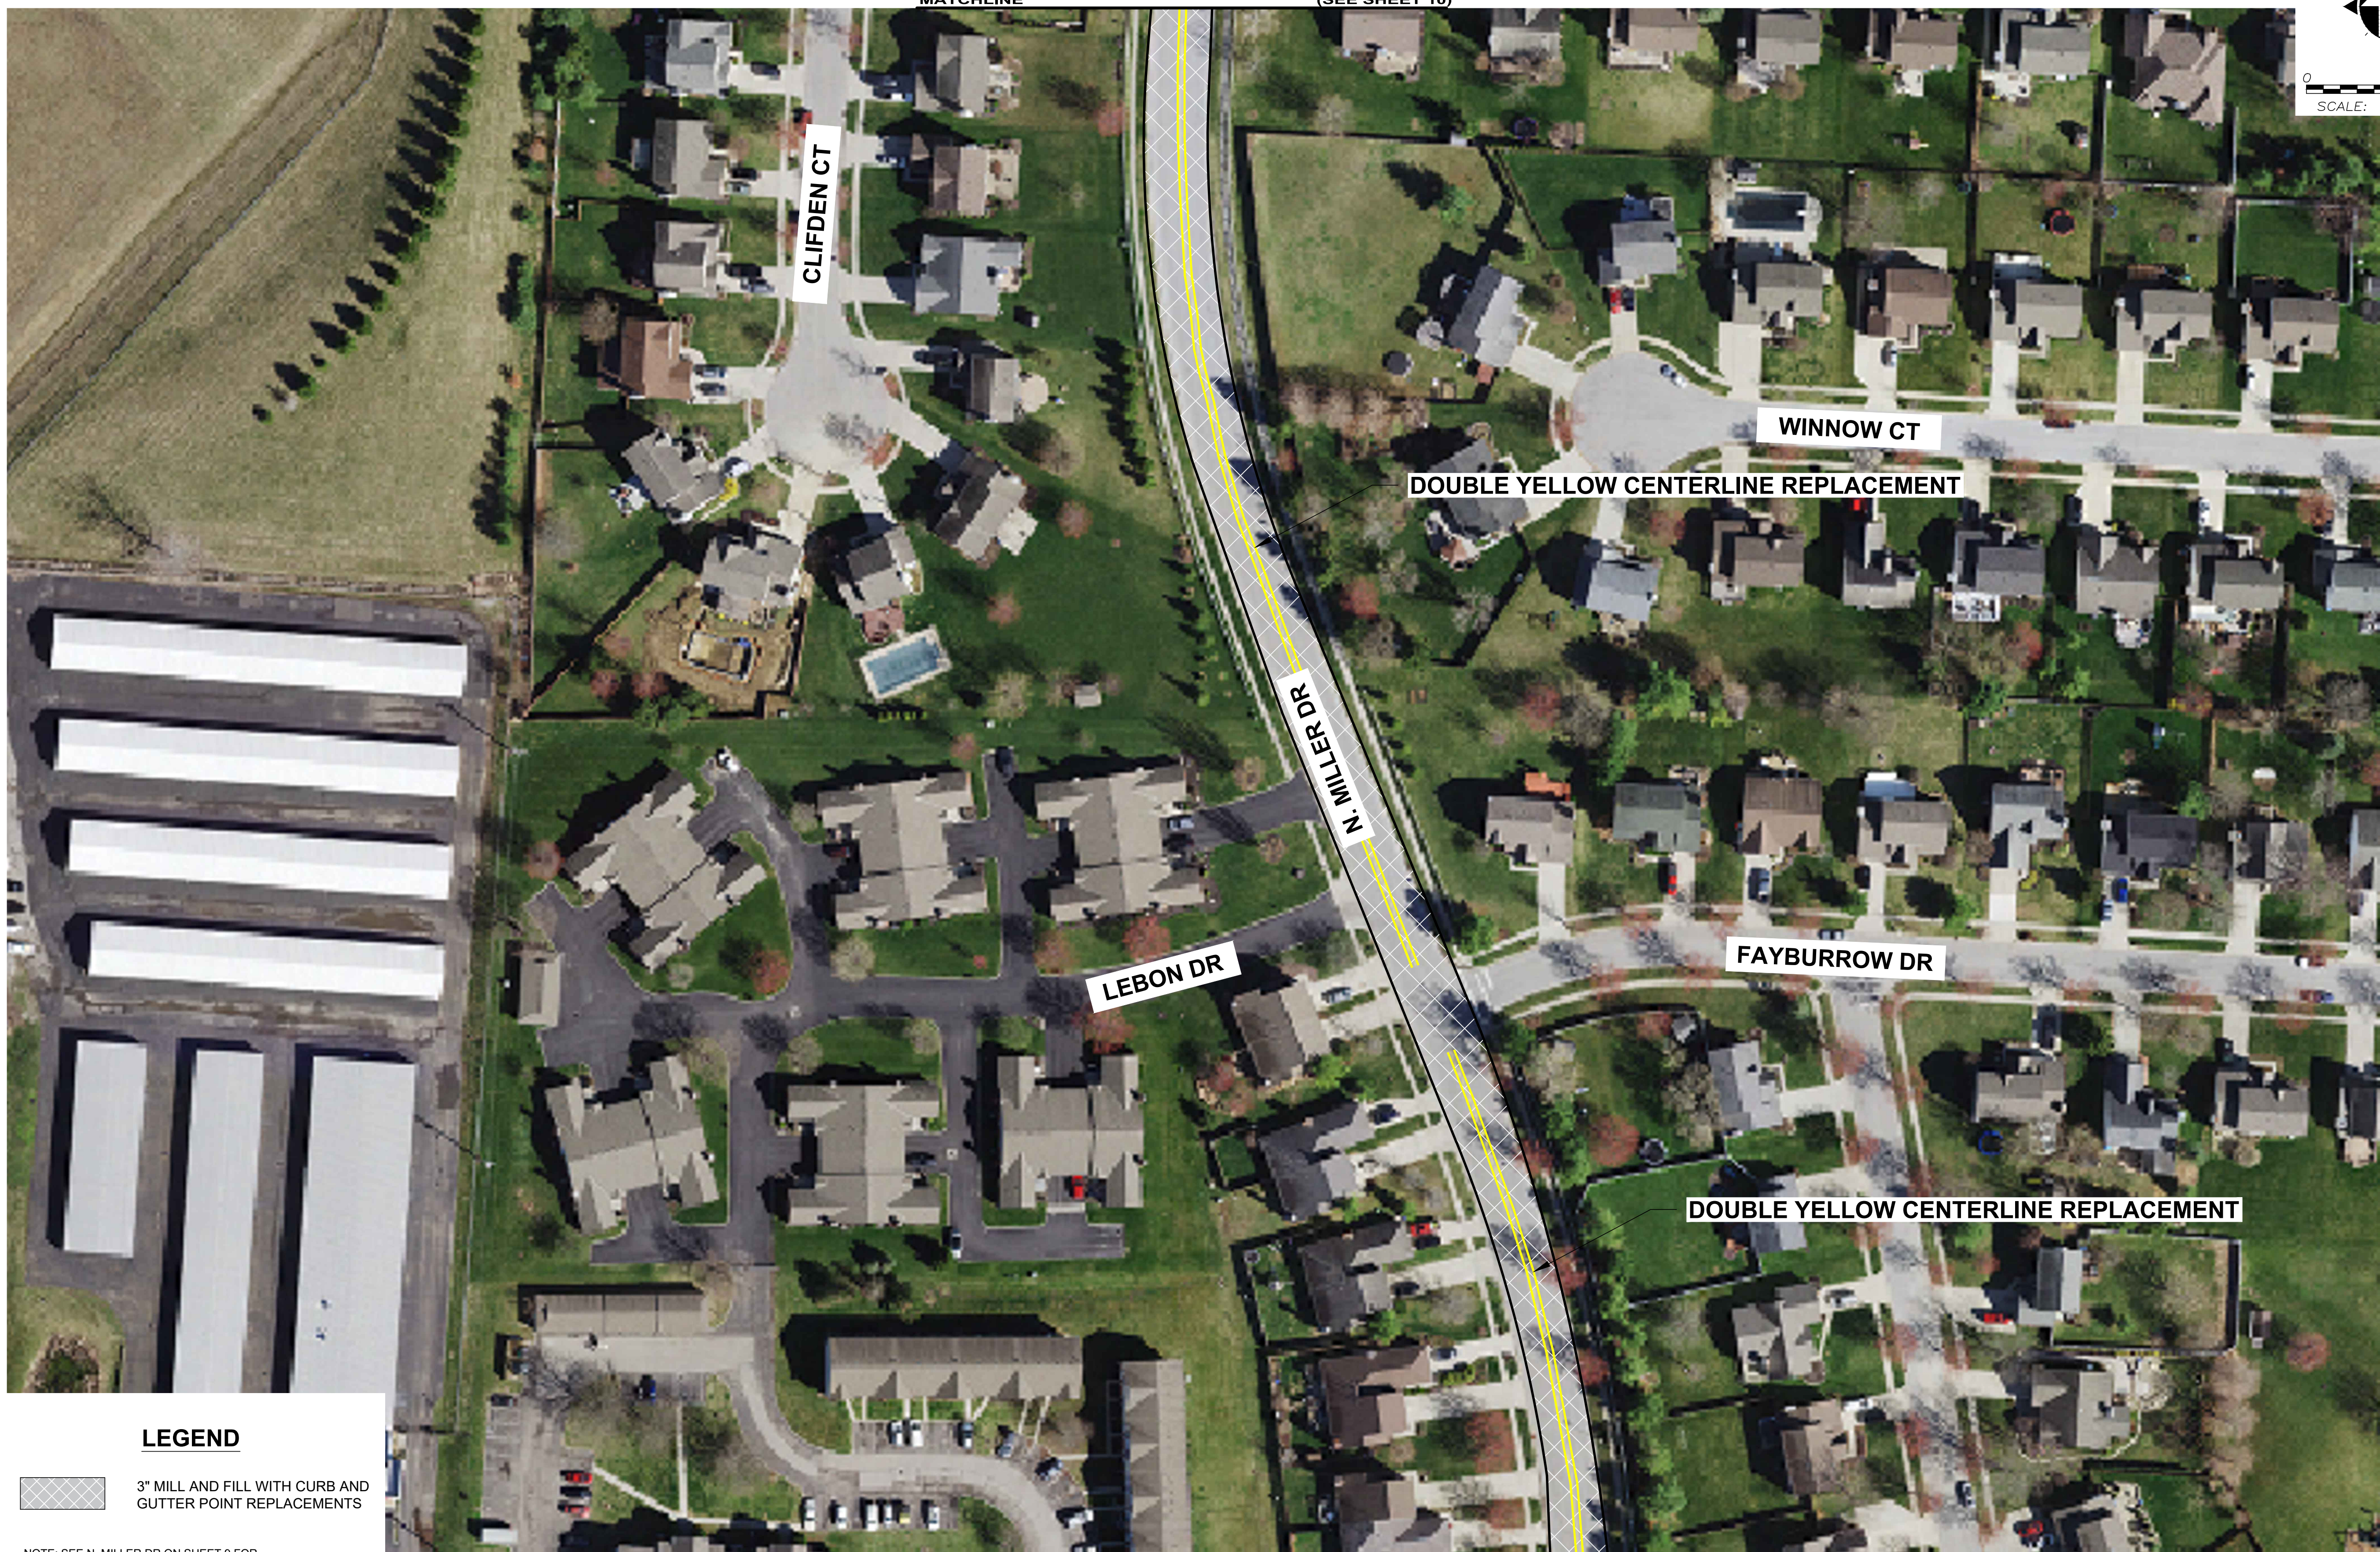

MATCHLINE

(SEE SHEET 10)



0 50 100
SCALE: 1" = 50'

CLIFDEN CT

WINNOW CT

DOUBLE YELLOW CENTERLINE REPLACEMENT

N. MILLER DR

FAYBURROW DR

LEBON DR

DOUBLE YELLOW CENTERLINE REPLACEMENT

MATCHLINE


(SEE SHEET 8)

N MILLER DRIVE

LEGEND

3" MILL AND FILL WITH CURB AND GUTTER POINT REPLACEMENTS


NOTE: SEE N. MILLER DR ON SHEET 9 FOR ESTIMATE OF QUANTITIES.

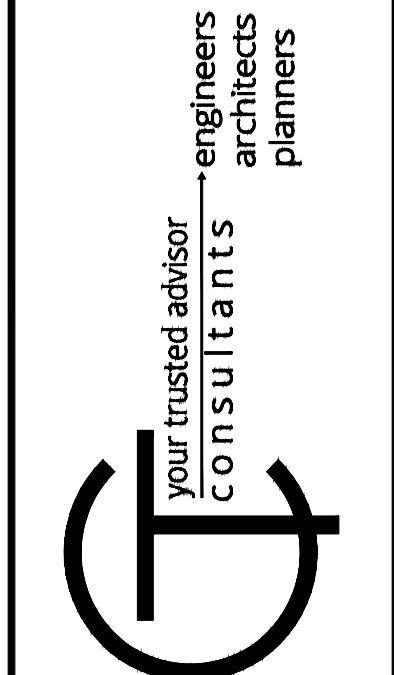


NO	REVISION	DATE

2024 STREET IMPROVEMENTS
- CITY OF SUNBURY, OHIO -
N. MILLER DR,


PROJECT NO. 24000704	
DISCIPLINE CIVIL	
SHEET NAME EXHIBIT	
SHEET 9	OF 12

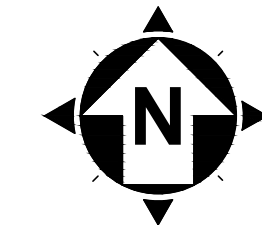

0 25 50
SCALE: 1" = 50'

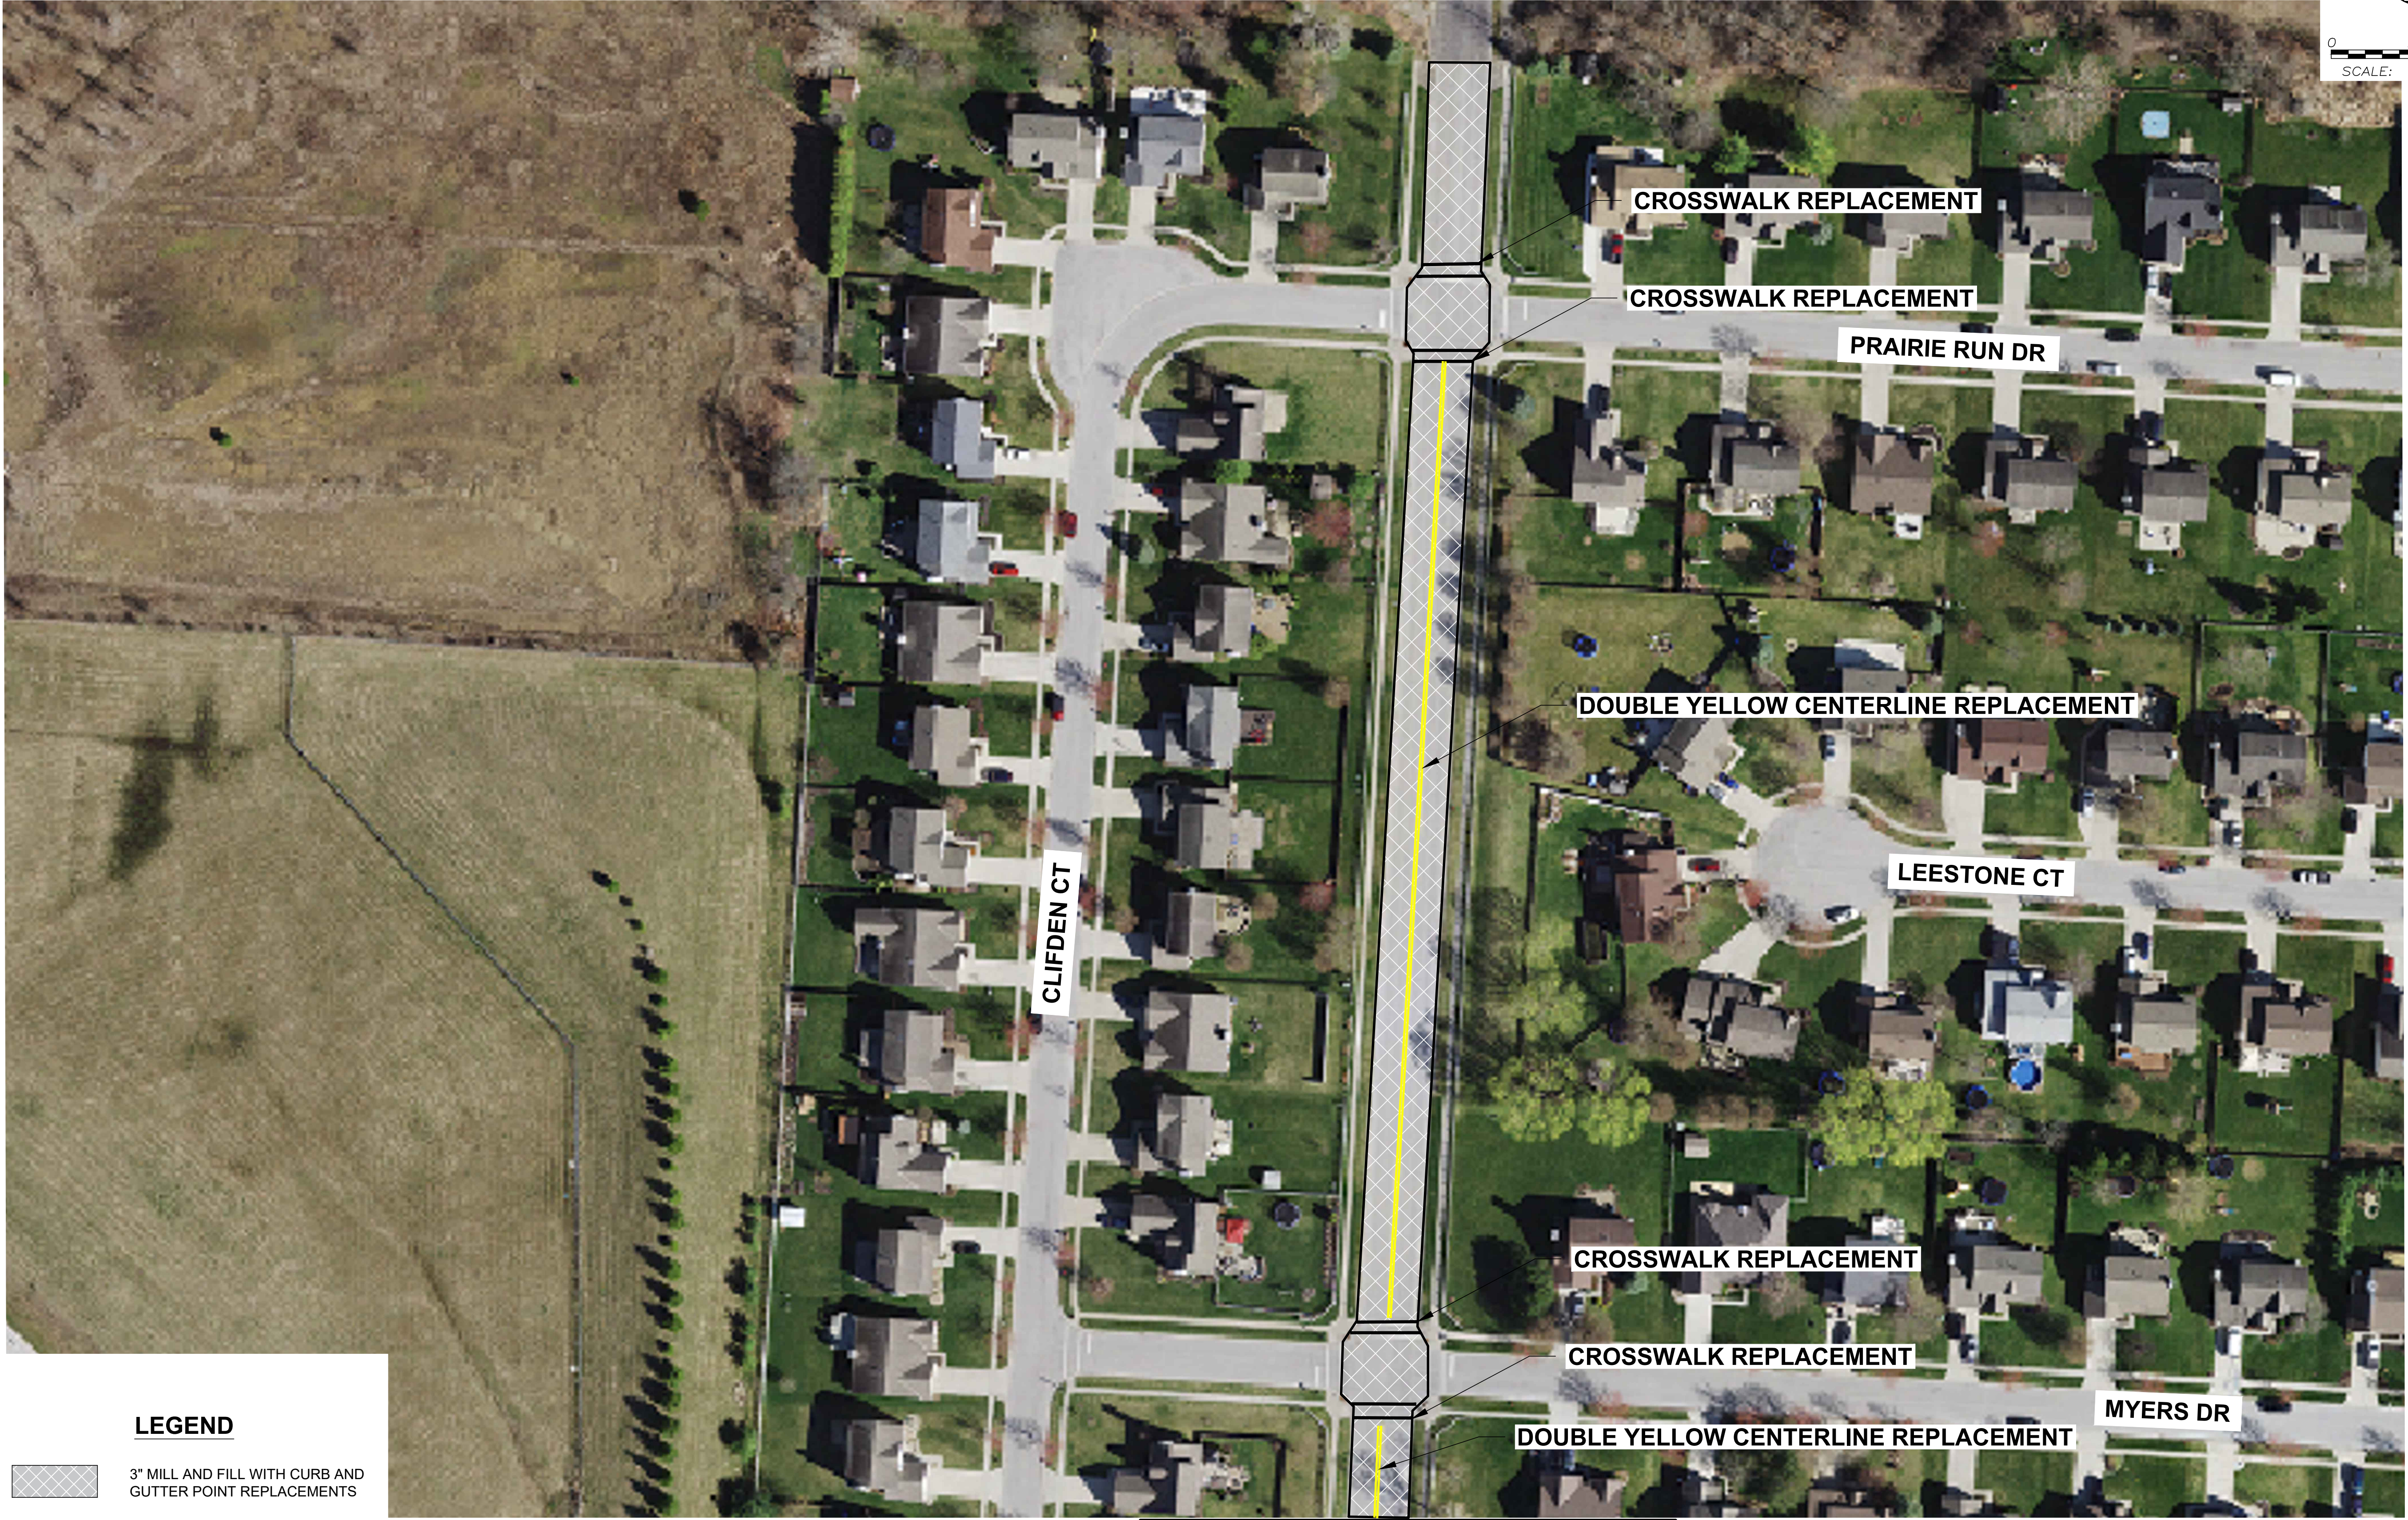


LEGEND

 3" MILL AND FILL WITH CURB AND GUTTER POINT REPLACEMENTS

NOTE: SEE N. MILLER DR ON SHEET 9 FOR ESTIMATE OF QUANTITIES.

MATCHLINE (SEE SHEET 9)

N MILLER DR

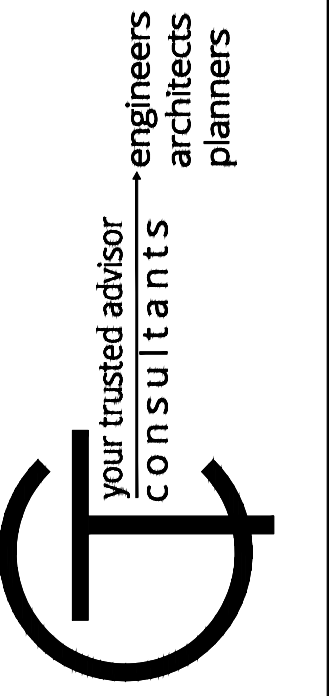


ISSUED FOR:	2024 SIP BID SET	NO	REVISION	DATE
ISSUE DATE:	05/13/2024			
SCALE:	1" = 50'			
DESIGNED BY:	MHA			
DRAWN BY:	ADG			
CHECKED BY:	DWW			

2024 STREET IMPROVEMENTS
 - CITY OF SUNBURY, OHIO -
N. MILLER DR,

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
10	12

ESTIMATE OF QUANTITIES			
S. VERNON ST - ALTERNATE			
ITEM	QTY	UNIT	DESCRIPTION
202	33	SF	WALK/RAMP REMOVED - CONTINGENCY ITEM
254	1370	SY	PAVEMENT PLANING (3")
407	120	GAL	TACK COAT (0.085 GAL/SY)
441	60	CY	AC SURFACE COURSE TYPE 1 PG 64-22 (1.5")
441	60	CY	AC INTERMEDIATE COURSE TYPE 2 (448) (1.5")
608	33	SF	CURB RAMP - CONTINGENCY ITEM
614	1	LS	MAINTAIN TRAFFIC
644	24	LF	CROSSWALK LINE, 24" CONTINENTAL
644	6	LF	STOP LINE


NOTE: THE ESTIMATE OF QUANTITIES ARE ESTIMATES ONLY FOR THE PURPOSE OF RECEIVING BIDS. THE CONTRACTOR SHALL VERIFY ALL QUANTITIES PRIOR TO PREPARING AND SUBMITTING THEIR BID. ANY ITEMS OF WORK CALLED FOR ON THE PLANS FOR WHICH NO SPECIFIC METHOD OF PAYMENT IS INDICATED SHALL BE PERFORMED BY THE CONTRACTOR AND THE COST INCLUDED IN THE PRICE BID FOR VARIOUS PROJECT ITEMS.

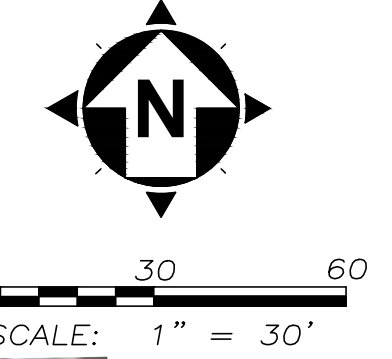

LEGEND

 3" MILL AND FILL WITH CURB AND GUTTER POINT REPLACEMENTS

your trusted advisor
consultants
 engineers
 architects
 planners

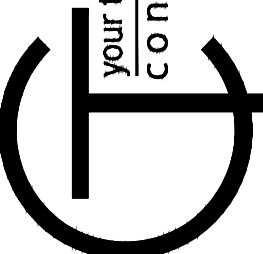

NO	REVISION	DATE

2024 STREET IMPROVEMENTS
 - CITY OF SUNBURY, OHIO -
S. VERNON ST

PROJECT NO.	24000704
DISCIPLINE	CIVIL
SHEET NAME	EXHIBIT
SHEET	OF
11	12

S. VERNON ST.

