


your trusted advisor
consultants

engineers
architects
planners


NO.	REVISION	DATE

ERIE STREET WATER LINE REPLACEMENT OF UTILITIES - WILLOUGHBY - DOWNTOWN IMPROVEMENTS

PROJECT NO.	180608
DISCIPLINE	CIVIL
SHEET NAME	DTI-01
SHEET	20
OF	20

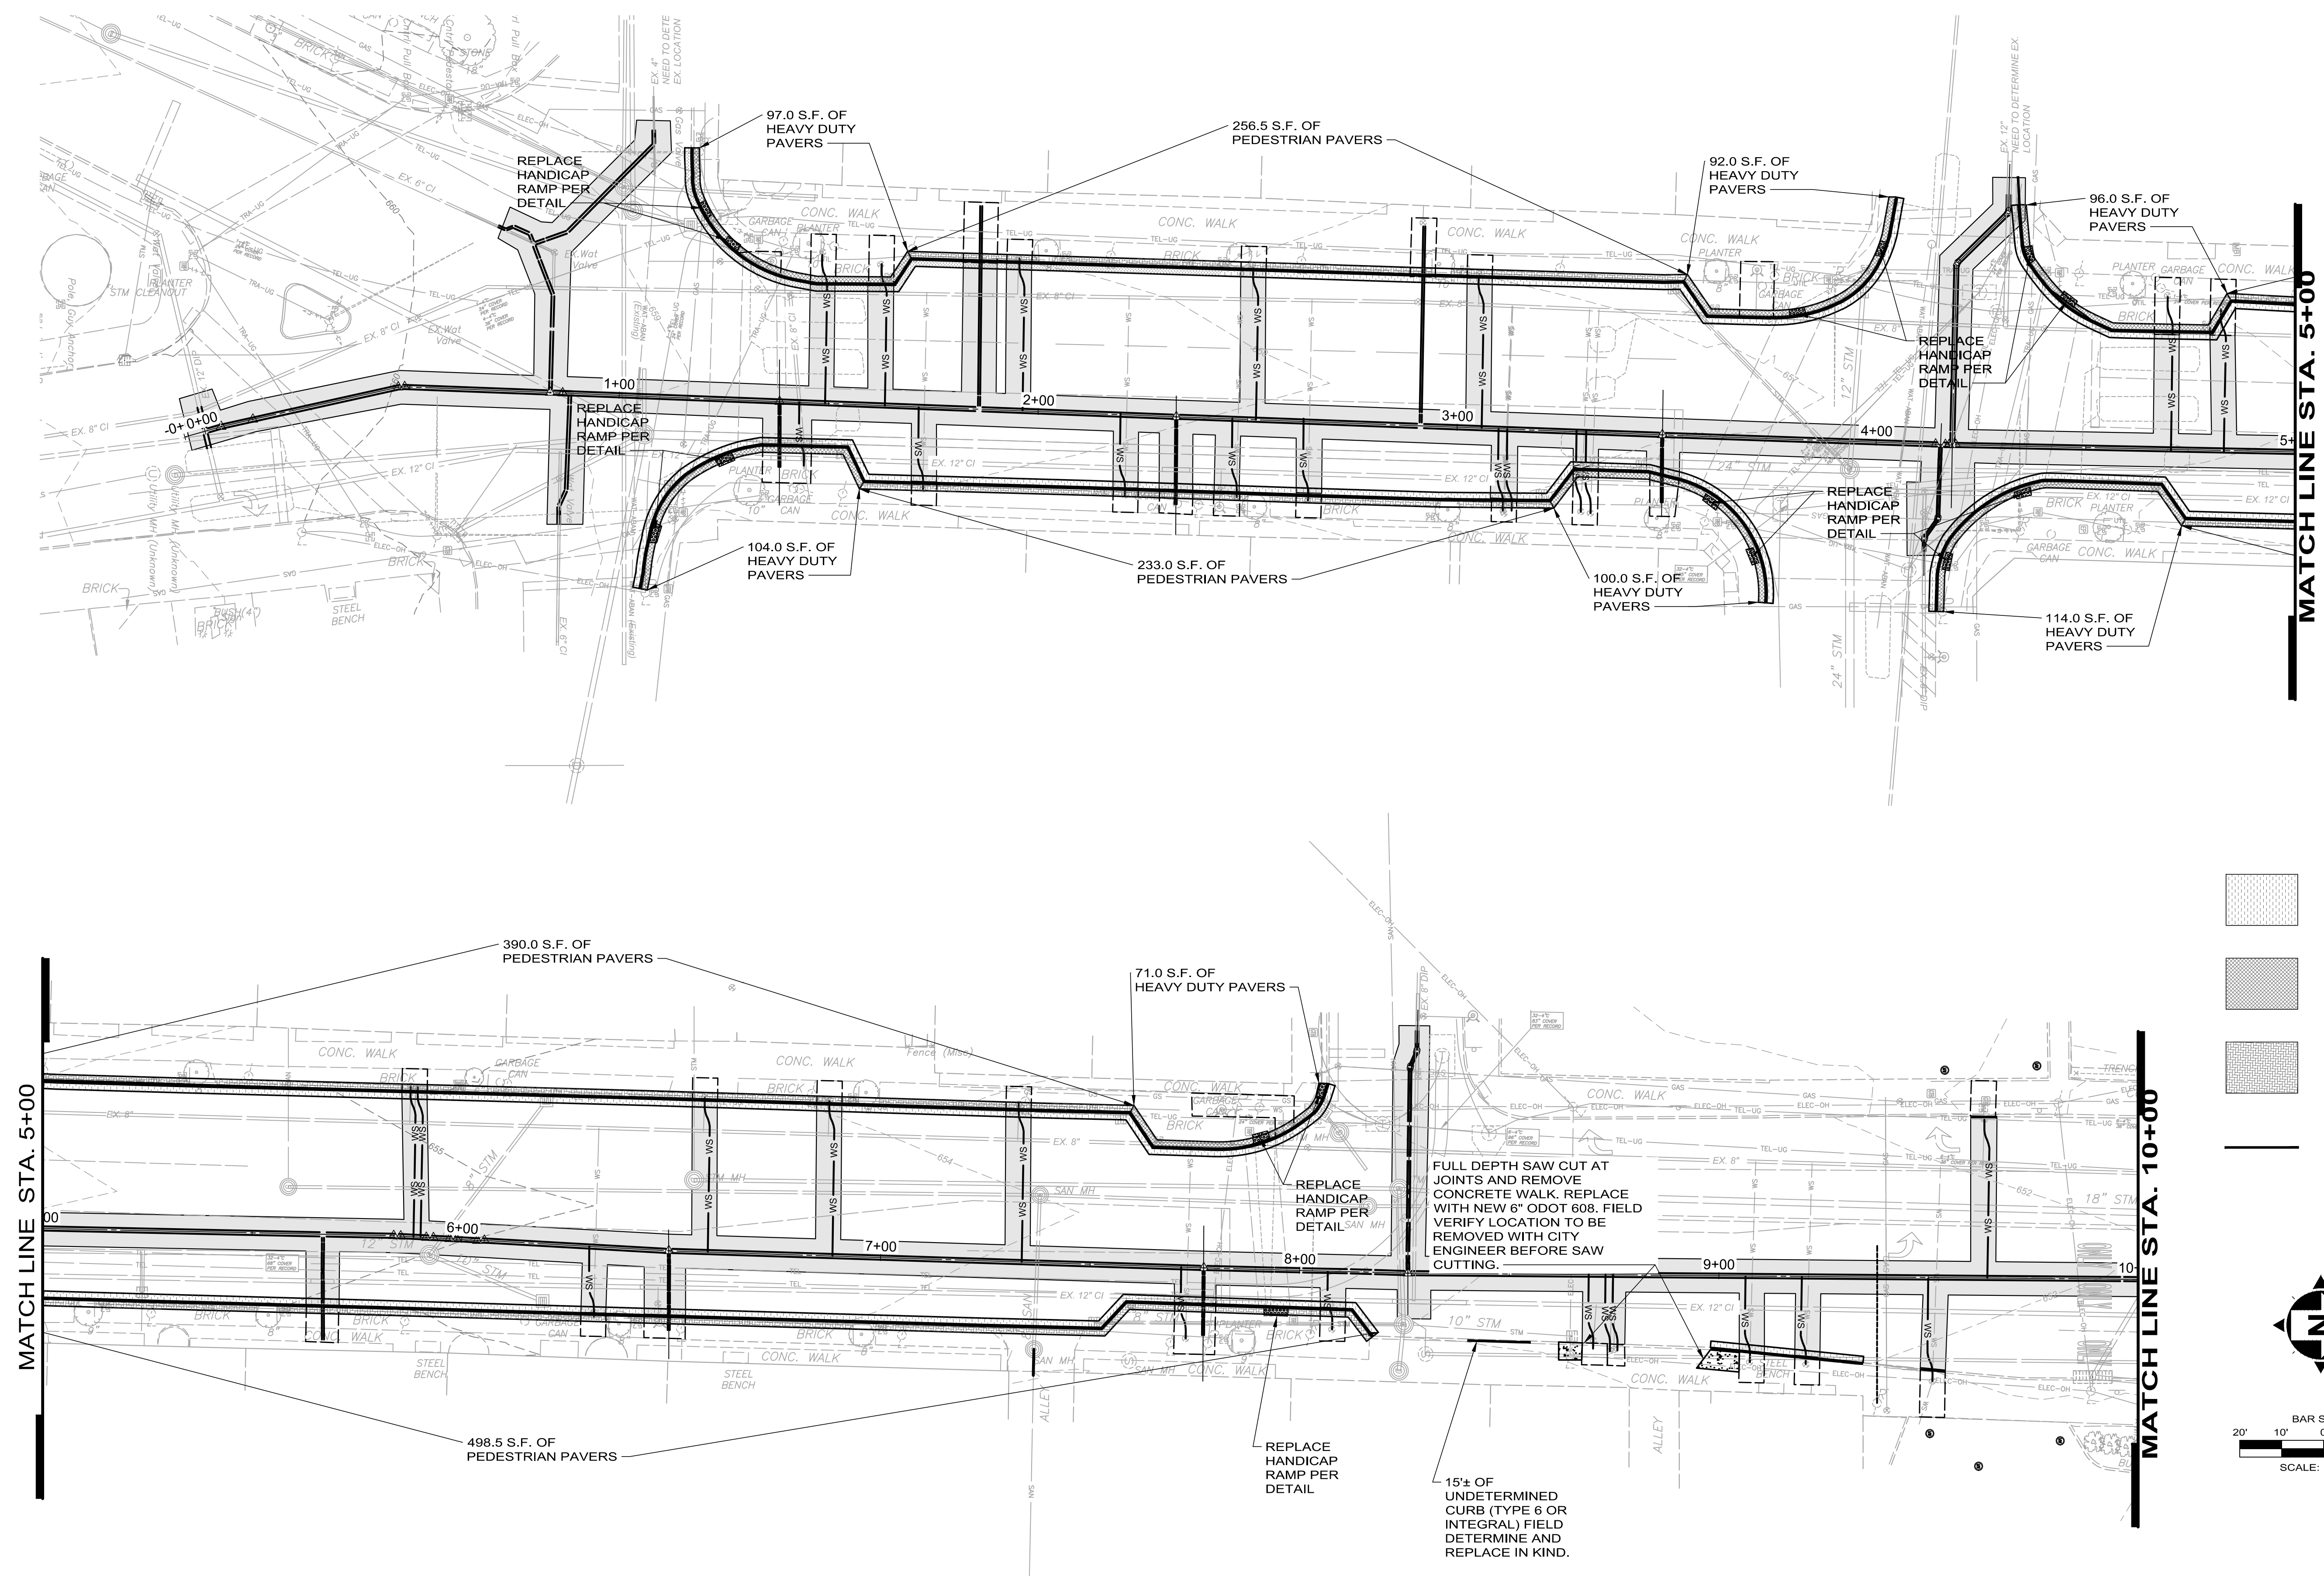

- TYPE C PAVEMENT REPLACEMENT, 18" WIDTH PER DETAILS 260 S.F. TOTAL
- HEAVY DUTY CLAY BRICK PAVEMENT REPLACEMENT, 18" WIDTH PER DETAILS 674 S.F. TOTAL
- PEDESTRIAN CLAY BRICK PAVEMENT REPLACEMENT, 18" WIDTH PER DETAILS 1,378 S.F. TOTAL
- TYPE 6 CURB, MODIFIED REPLACEMENT - included in the per unit cost for the various waterline trench repairs and Pedestrian Clay Brick Pavement (pavers) Replacement Items.

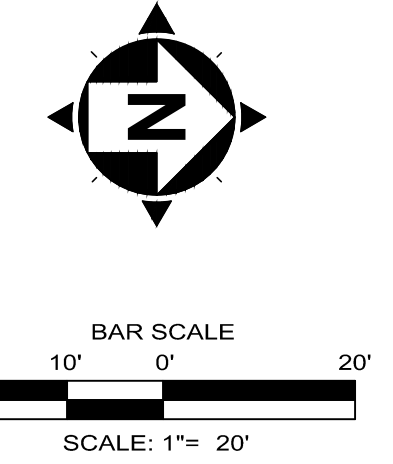

FULL DEPTH SAW CUT AT JOINTS AND REMOVE CONCRETE WALK. REPLACE WITH NEW 6" ODOT 608. FIELD VERIFY LOCATION TO BE REMOVED WITH CITY ENGINEER BEFORE SAW CUTTING.

15± OF UNDETERMINED CURB (TYPE 6 OR INTEGRAL) FIELD DETERMINE AND REPLACE IN KIND.